

# 24" H x 30" W x 16" D 1 DOOR DESIGN



FILE NUMBER: E507642

NEMA 4/12 - ENCLOSURE  
ELECTRICAL CABINET  
FLOOR MOUNT

## ENCLOSURE MATERIAL

- ☐ POWDER COATED STEEL (CS)
- ☐ POWDER COATED ALUMINUM (AL)

## POWDERCOAT COLOR


- ☐ STANDARD WHITE
- ☐ LIGHT GRAY ANSI 70
- ☐ DARK GRAY ANSI 61
- ☐ STANDARD BLACK
- ☐ CUSTOM \_\_\_\_\_

## FLOOR KIT

- ☐ 6" HT. (STANDARD)
- ☐ 8" HT.
- ☐ 10" HT.
- ☐ 12" HT.
- ☐ CUSTOM \_\_\_\_\_

## FLOOR KIT OPTIONS

- ☐ FIXED FLOOR KIT
- ☐ REMOVABLE FLOOR KIT

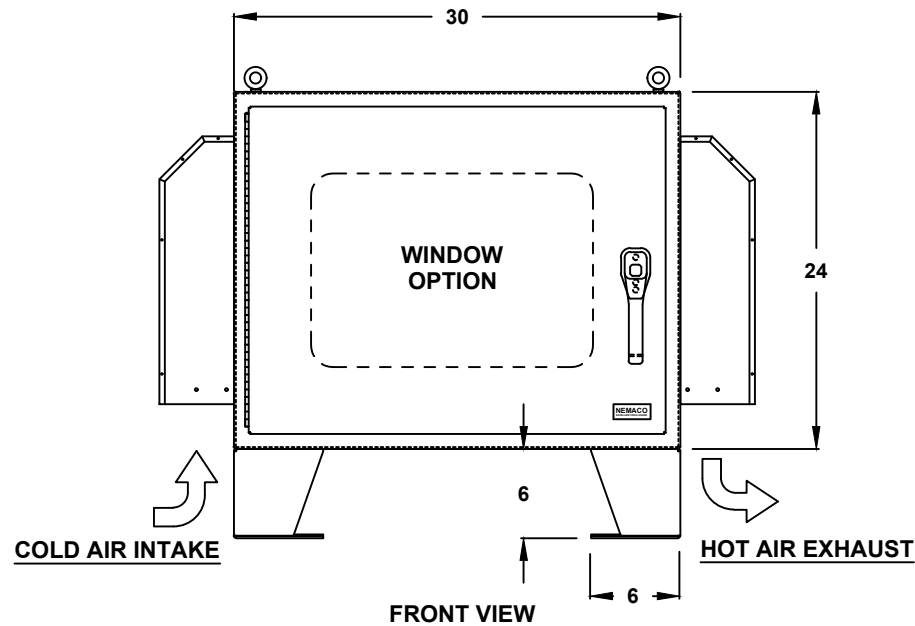

## LIFTING EYE

- ☐ WELDED PADS (STANDARD)
- ☐ REMOVABLE PADEYES

## DOOR HINGE

- ☐ PIANO HINGE
- ☐ LIFT OFF HINGE

## DOOR LATCH OPTIONS

- ☐ 3 PT. LATCH (STANDARD)
- ☐ CLAMP SCREW WITH HASP

## DOOR HANDLE

- ☐ PADLOCK PROVISION (STANDARD)
- ☐ KEYLOCK (OPTION)

## \*WINDOW OPTIONS

- ☐ TEMPERED GLASS
- ☐ NOT REQUIRED

ALL DIMENSIONS ARE ESTIMATED IN INCHES  
AND MAY VARY DUE TO SELECTED OPTIONS.

COMPANY NAME \_\_\_\_\_

APPROVED (PRINTED NAME) \_\_\_\_\_

SIGNATURE \_\_\_\_\_

DATE \_\_\_\_\_

# 24" H x 30" W x 16" D

## 1 DOOR DESIGN

### THERMAL SPECIFICATIONS

- ☐ OUTSIDE (AMBIENT) \_\_\_\_\_ °F  
☐ INTERIOR TEMP. \_\_\_\_\_ °F  
☐ HEAT LOAD (WATTS) \_\_\_\_\_  
☐ SUN / SHADE \_\_\_\_\_

### FAN SERIES

- ☐ 60FL SERIES, 18" H (40-92 CFM)  
☐ 180FL SERIES, 24" H (177-179 CFM)  
☐ 225FL SERIES, 24" H (350 CFM)

### FAN MATERIALS

- ☐ BAKED POWDER STEEL  
☐ STAINLESS STEEL

### FAN SYSTEM


- ☐ PUSH-PULL SYSTEM (STANDARD)  
☐ PUSH SYSTEM  
☐ PULL SYSTEM  
☐ NOT REQUIRED

### FAN VOLTAGE/ HZ

- ☐ 115/60 (STANDARD)  
☐ 230/60  
☐ 12 VDC  
☐ 24 VDC  
☐ 48 VDC  
☐ SPECIFY \_\_\_\_\_

### ACCESSORIES AND OPTIONS

- ☐ REPLACEMENT FILTER

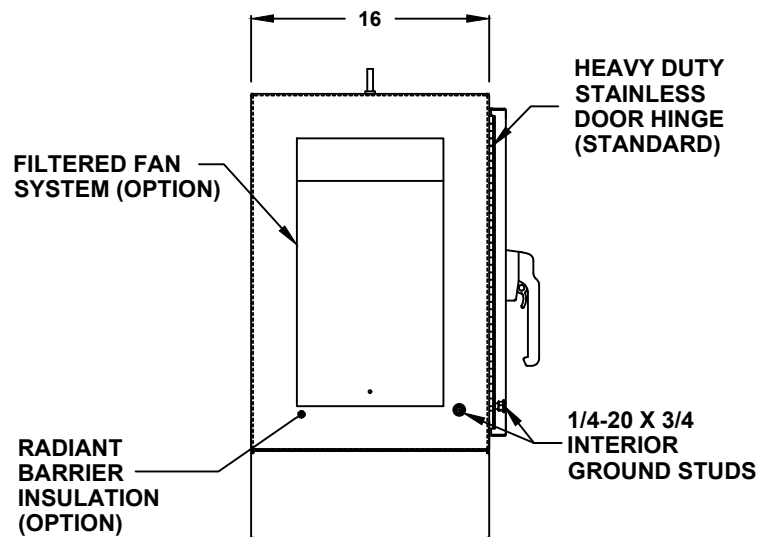

LEFT SIDE

### SUN REFLECTIVE SOLUTION

- ☐ TOP SUNSHIELD COVER

### ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)  
☐ 3/4 RADIANT BARRIER  
☐ 1 RADIANT BARRIER  
☐ NOT REQUIRED


### FAN SERVICE DOOR

- ☐ FAN SERVICE DOOR  
☐ NOT REQUIRED


### ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)  
☐ 3/4 RADIANT BARRIER  
☐ 1 RADIANT BARRIER  
☐ NOT REQUIRED

# 24" H x 30" W x 16" D 1 DOOR DESIGN

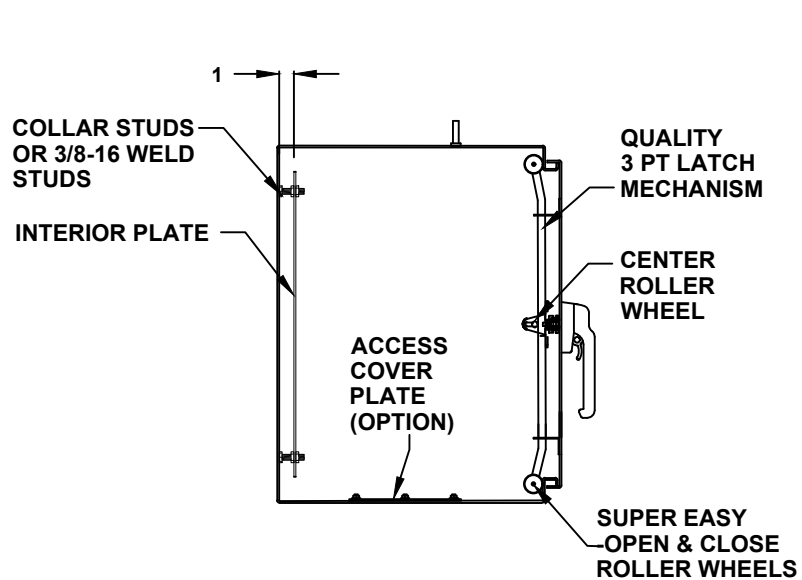

CROSS SECTION VIEW A-A

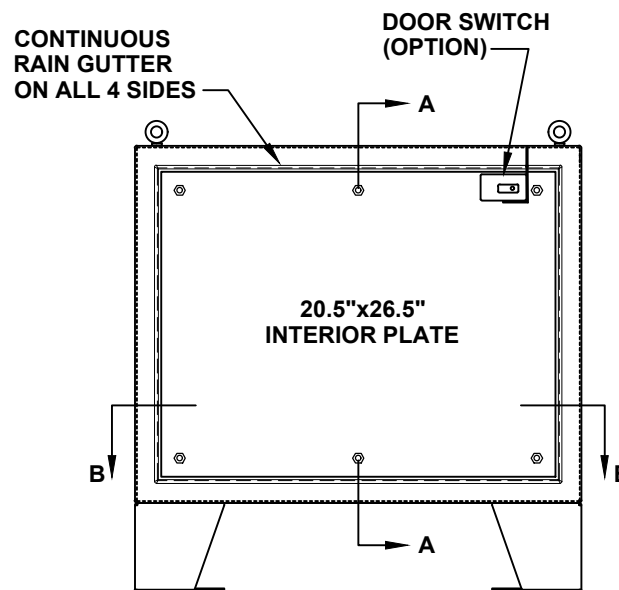

FRONT VIEW WITH DOOR REMOVED

## DOOR ACCESSORIES

- ☐ DOOR SWITCH
- ☐ PRINT POCKET

## INTERIOR PLATE

- ☐ COATED STEEL (IP2430-CS)
- ☐ COATED ALUMINUM (IP2430-AL)
- ☐ 304 STAINLESS STEEL (IP2430-S4)
- ☐ 316 STAINLESS STEEL (IP2430-S6)

# 24" H x 30" W x 16" D

## 1 DOOR DESIGN

DOOR STOPPER

- ☐ INSTALL DOOR STOPPER  
☐ NOT REQUIRED

BASE ACCESS COVER PLATE (OPTION)



- ☐ 8x8 PLATE (6x6 CUT-OUT)  
☐ 8x16 PLATE (6x14 CUT-OUT)  
☐ 12x12 PLATE (10x10 CUT-OUT)  
☐ 16x16 PLATE (14x14 CUT-OUT)

CONDUIT/CABLE SEAL OPTIONS

- ☐ ROXTEC SEAL SOLUTION  
☐ PIPE FITTING HUB  
☐ CABLE GLAND


SIDE ACCESS COVER PLATE MAT'L

- ☐ POWDER COATED STEEL  
☐ POWDER COATED ALUMINUM  
☐ STAINLESS STEEL, 304

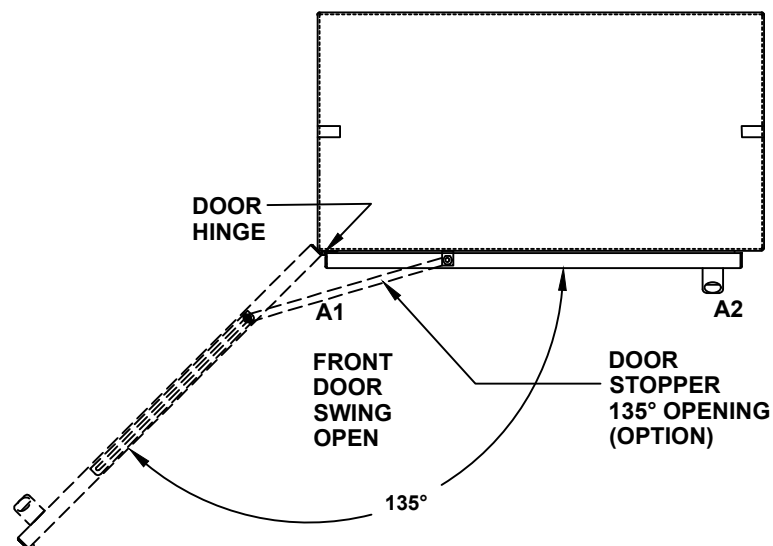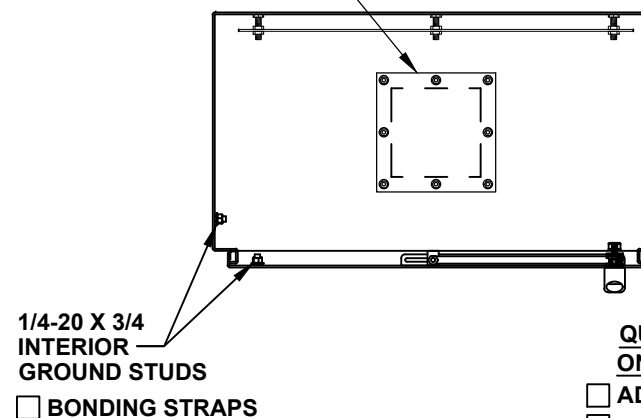
TOP VIEWTOP CROSS SECTION VIEW B-BQUAD OUTLET BOX ON 8x8 PLATE (OPTION)

- ☐ ADD QUAD BOX  
☐ 15A 115V RECEPTACLE  
☐ 20A 115V RECEPTACLE  
☐ NOT REQUIRED


24" H x 30" W x 16" D  
1 DOOR DESIGN

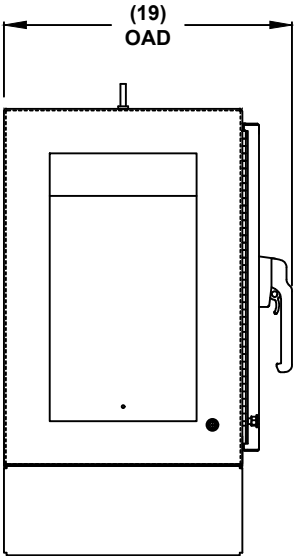

LEFT SIDE

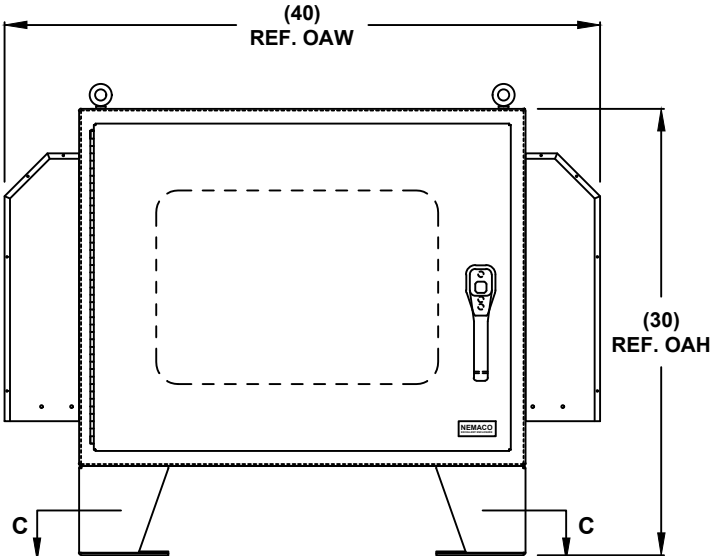

FRONT VIEW

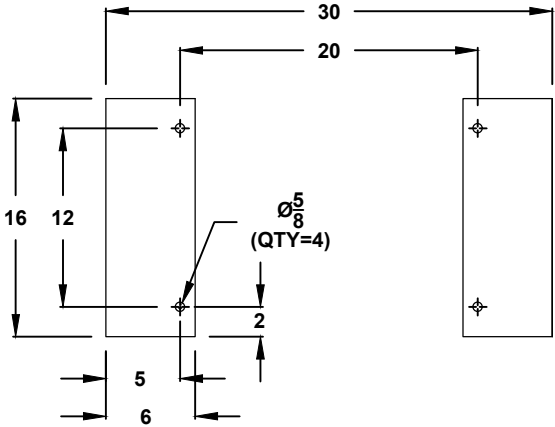

CROSS SECTION VIEW C-C  
MOUNTING HOLES