

24" H x 36" W x 24" D 1 DOOR DESIGN



FILE NUMBER: E507642

NEMA 4X - ENCLOSURE
ELECTRICAL CABINET
WALL MOUNT

STAINLESS STEEL

ENCLOSURE MATERIAL


- ☐ 304 STAINLESS STEEL (S4)
- ☐ 316 STAINLESS STEEL (S6)

POWDERCOAT COLOR

- ☐ STANDARD WHITE
- ☐ LIGHT GRAY ANSI 70
- ☐ DARK GRAY ANSI 61
- ☐ STANDARD BLACK
- ☐ CUSTOM _____

WALL BRACKET (OPTIONS)

- ☐ WALL TABS (STANDARD)
- ☐ HEAVY DUTY BRACKETS
- ☐ POLE MOUNT BRACKETS

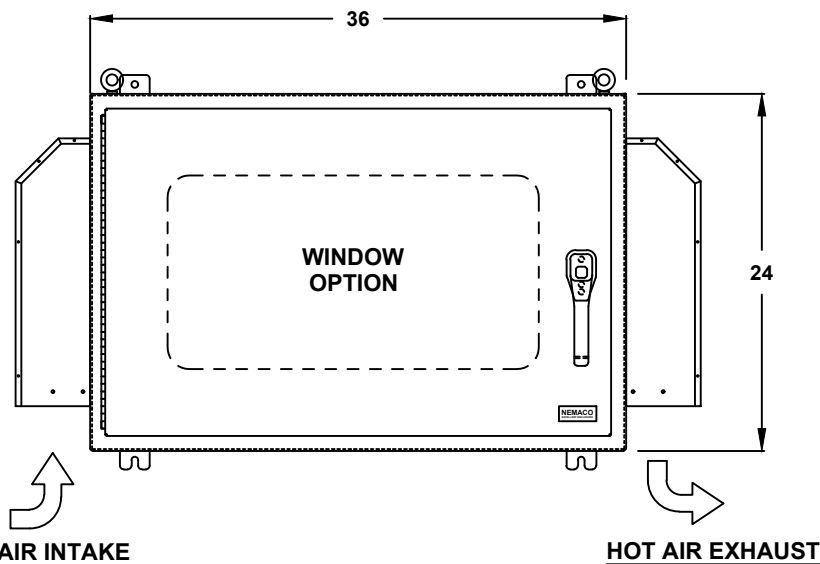

FRONT VIEW

LIFTING EYE

- ☐ WELDED PADS (STANDARD)
- ☐ REMOVABLE PADEYES

DOOR HINGE

- ☐ PIANO HINGE
- ☐ LIFT OFF HINGE

DOOR LATCH OPTIONS

- ☐ 3 PT. LATCH (STANDARD)
- ☐ CLAMP SCREW WITH HASP

DOOR HANDLE

- ☐ PADLOCK PROVISION (STANDARD)
- ☐ KEYLOCK (OPTION)

*WINDOW OPTIONS

- ☐ TEMPERED GLASS
- ☐ NOT REQUIRED

ALL DIMENSIONS ARE ESTIMATED IN INCHES
AND MAY VARY DUE TO SELECTED OPTIONS.

COMPANY NAME

APPROVED (PRINTED NAME)

SIGNATURE

DATE

24" H x 36" W x 24" D
1 DOOR DESIGN

THERMAL SPECIFICATIONS

- ☐ OUTSIDE (AMBIENT) _____ °F
☐ INTERIOR TEMP. _____ °F
☐ HEAT LOAD (WATTS) _____
☐ SUN / SHADE _____

FAN SERIES

- ☐ 60FL SERIES, 18" H (40-92 CFM)
- ☐ 180FL SERIES, 24"H (177-179 CFM)
- ☐ 225FL SERIES, 24"H (350 CFM)

FAN MATERIALS

- ☐ BAKED POWDER STEEL
☐ STAINLESS STEEL

FAN SYSTEM


- ☐ **PUSH-PULL SYSTEM (STANDARD)**
☐ **PUSH SYSTEM**
☐ **PULL SYSTEM**
☐ **NOT REQUIRED**

FAN VOLTAGE/ HZ

- ☐ 115/60 (STANDARD)
☐ 230/60
☐ 12 VDC
☐ 24 VDC
☐ 48 VDC
☐ SPECIFY

ACCESSORIES AND OPTIONS

- ☐ **REPLACEMENT FILTER**

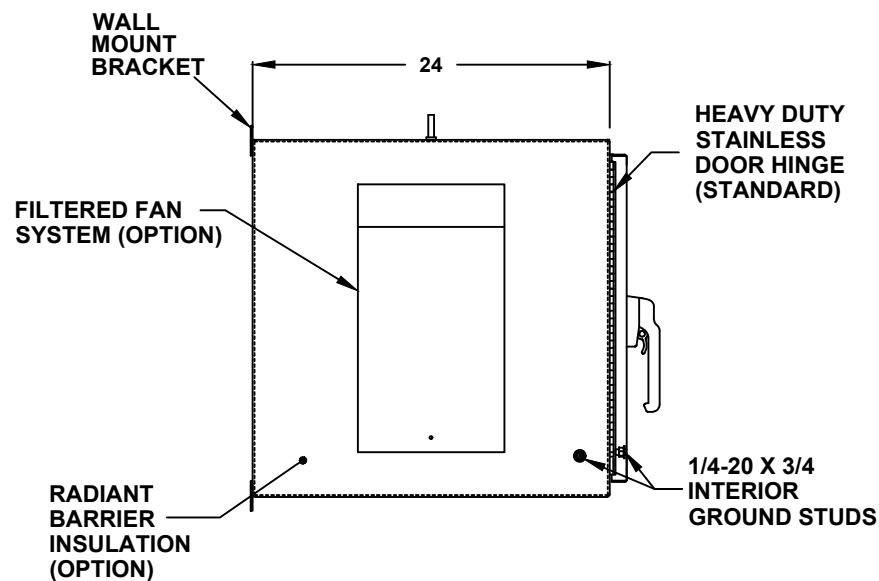

SUN REFLECTIVE SOLUTION

- ☐ TOP SUNSHIELD COVER

ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)
☐ 3/4 RADIANT BARRIER
☐ 1 RADIANT BARRIER
☐ NOT REQUIRED

FAN SERVICE DOOR


- ☐ FAN SERVICE DOOR
☐ NOT REQUIRED

ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)
☐ 3/4 RADIANT BARRIER
☐ 1 RADIANT BARRIER
☐ NOT REQUIRED

24" H x 36" W x 24" D

1 DOOR DESIGN

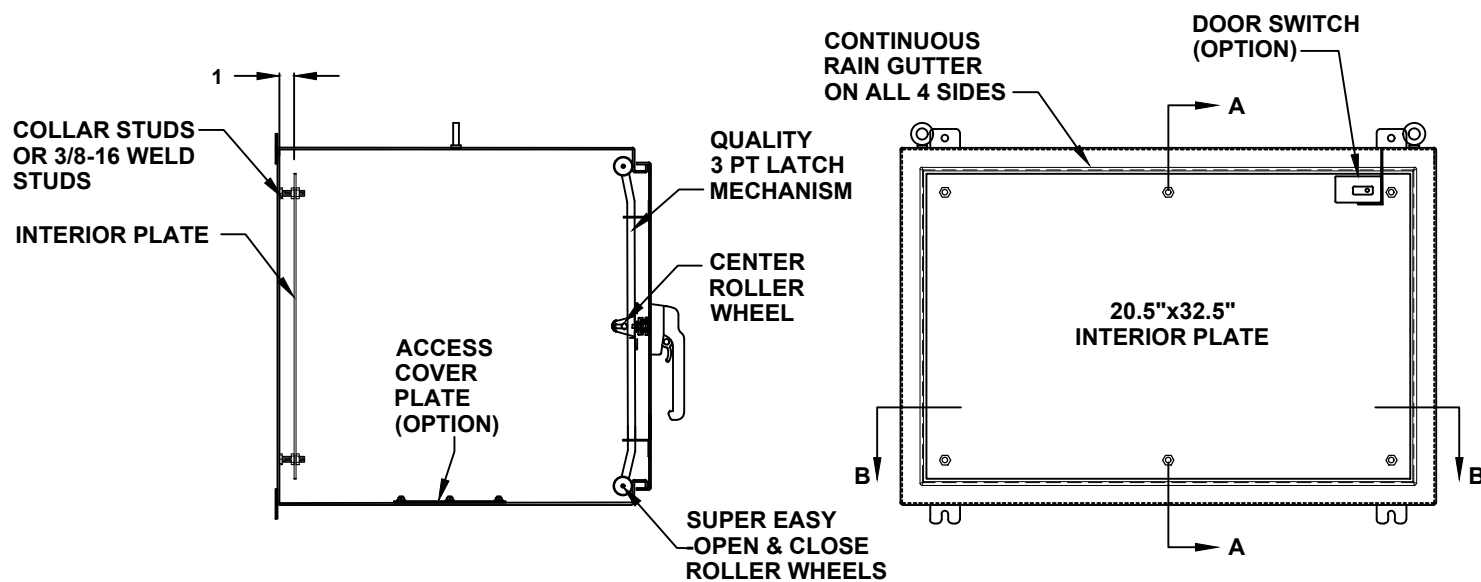

CROSS SECTION VIEW A-A

FRONT VIEW WITH DOOR REMOVED

DOOR ACCESSORIES

- ☐ DOOR SWITCH
- ☐ PRINT POCKET

INTERIOR PLATE

- ☐ COATED STEEL (IP2436-CS)
- ☐ COATED ALUMINUM (IP2436-AL)
- ☐ 304 STAINLESS STEEL (IP2436-S4)
- ☐ 316 STAINLESS STEEL (IP2436-S6)

24" H x 36" W x 24" D 1 DOOR DESIGN

DOOR STOPPER

- ☐ INSTALL DOOR STOPPER
☐ NOT REQUIRED

BASE ACCESS COVER PLATE (OPTION)



- ☐ 8x8 PLATE (6x6 CUT-OUT)
☐ 8x16 PLATE (6x14 CUT-OUT)
☐ 12x12 PLATE (10x10 CUT-OUT)
☐ 16x16 PLATE (14x14 CUT-OUT)

CONDUIT/CABLE SEAL OPTIONS

- ☐ ROXTEC SEAL SOLUTION
☐ PIPE FITTING HUB
☐ CABLE GLAND

SIDE ACCESS COVER PLATE MAT'L

- ☐ POWDER COATED STEEL
☐ POWDER COATED ALUMINUM
☐ STAINLESS STEEL, 304

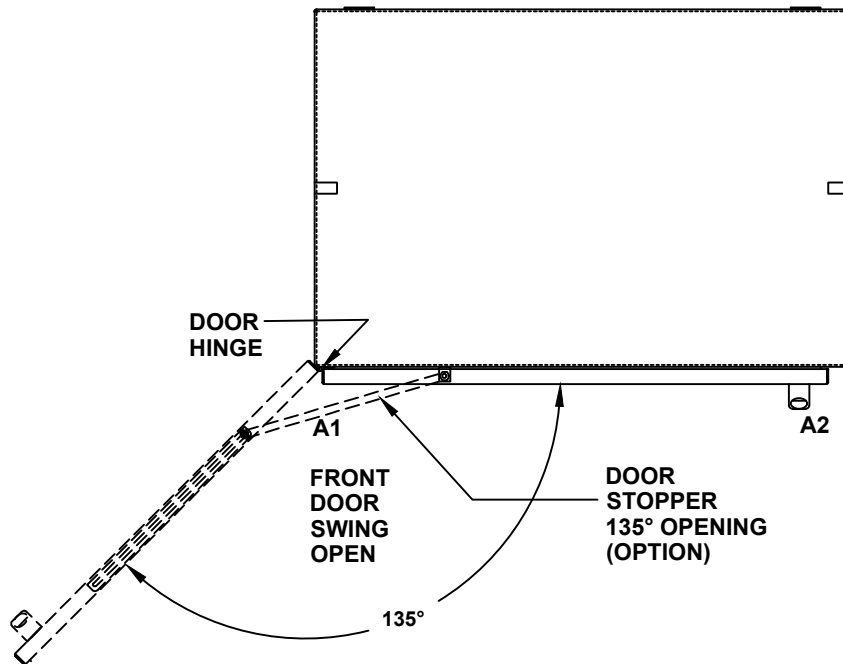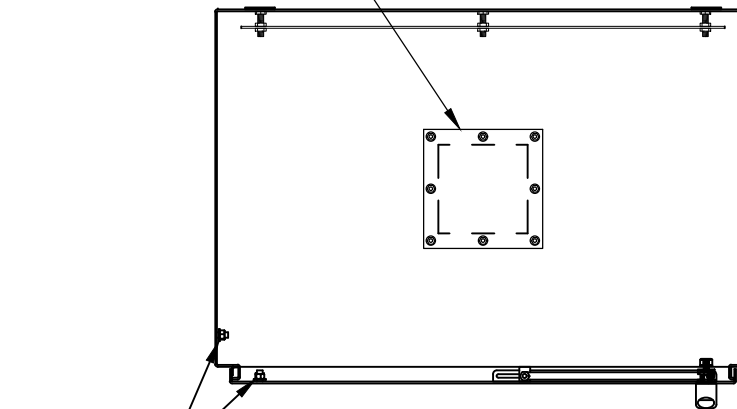
TOP VIEWTOP CROSS SECTION VIEW B-B

- 1/4-20 X 3/4
INTERIOR
GROUND STUDS
☐ BONDING STRAPS


QUAD OUTLET BOX
ON 8x8 PLATE (OPTION)

- ☐ ADD QUAD BOX
☐ 15A 115V RECEPTACLE
☐ 20A 115V RECEPTACLE
☐ NOT REQUIRED

24" H x 36" W x 24" D
1 DOOR DESIGN

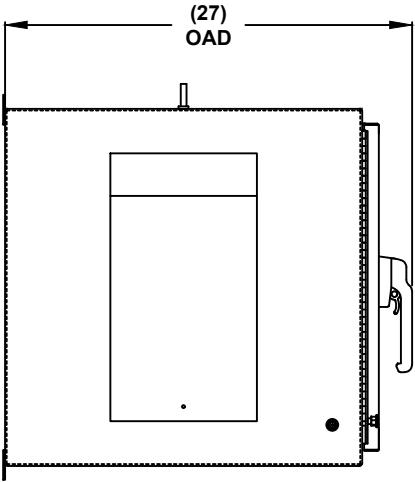

LEFT SIDE

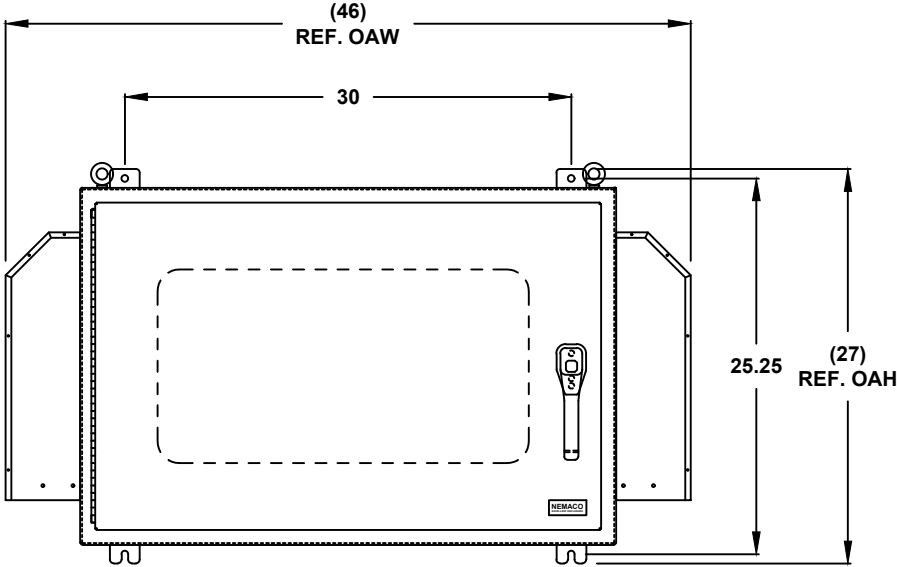

FRONT VIEW