

24" H x 30" W x 20" D 1 DOOR DESIGN



FILE NUMBER: E507642

NEMA 4X - ENCLOSURE
ELECTRICAL CABINET
FLOOR MOUNT

STAINLESS STEEL

ENCLOSURE MATERIAL

- ☐ 304 STAINLESS STEEL (S4)
- ☐ 316 STAINLESS STEEL (S6)

POWDERCOAT COLOR

- ☐ STANDARD WHITE
- ☐ LIGHT GRAY ANSI 70
- ☐ DARK GRAY ANSI 61
- ☐ STANDARD BLACK
- ☐ CUSTOM _____

FLOOR KIT

- ☐ 6" HT. (STANDARD)
- ☐ 8" HT.
- ☐ 10" HT.
- ☐ 12" HT.
- ☐ CUSTOM _____

FLOOR KIT OPTIONS

- ☐ FIXED FLOOR KIT
- ☐ REMOVABLE FLOOR KIT

LIFTING EYE

- ☐ WELDED PADS (STANDARD)
- ☐ REMOVABLE PADEYES

DOOR HINGE

- ☐ PIANO HINGE
- ☐ LIFT OFF HINGE

DOOR LATCH OPTIONS


- ☐ 3 PT. LATCH (STANDARD)
- ☐ CLAMP SCREW WITH HASP

DOOR HANDLE

- ☐ PADLOCK PROVISION (STANDARD)
- ☐ KEYLOCK (OPTION)

*WINDOW OPTIONS

- ☐ TEMPERED GLASS
- ☐ NOT REQUIRED

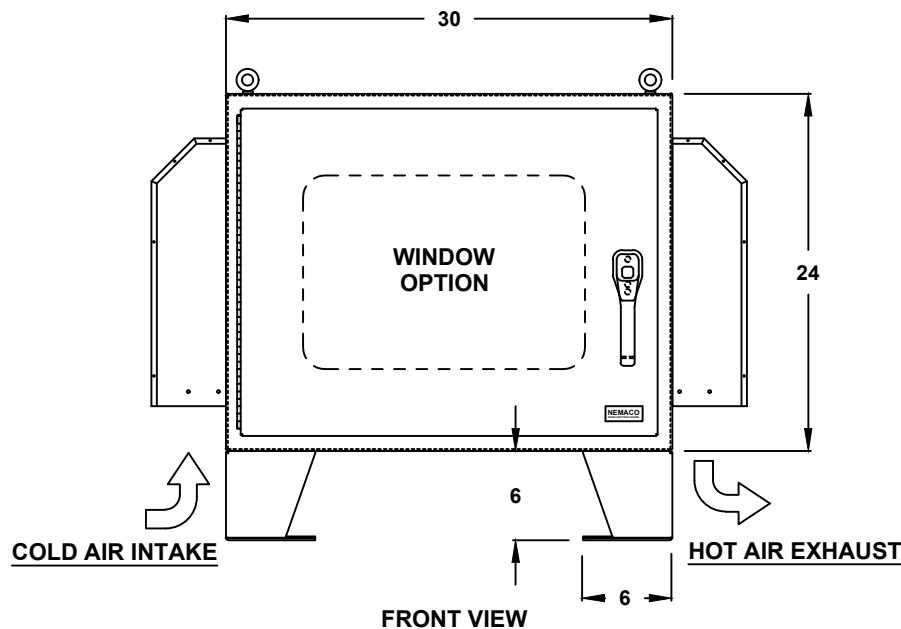

ALL DIMENSIONS ARE ESTIMATED IN INCHES
AND MAY VARY DUE TO SELECTED OPTIONS.

COMPANY NAME

APPROVED (PRINTED NAME)

SIGNATURE

DATE

24" H x 30" W x 20" D

1 DOOR DESIGN

THERMAL SPECIFICATIONS

- ☐ OUTSIDE (AMBIENT) _____ °F
☐ INTERIOR TEMP. _____ °F
☐ HEAT LOAD (WATTS) _____
☐ SUN / SHADE _____

FAN SERIES

- ☐ 60FL SERIES, 18" H (40-92 CFM)
☐ 180FL SERIES, 24" H (177-179 CFM)
☐ 225FL SERIES, 24" H (350 CFM)

FAN MATERIALS

- ☐ BAKED POWDER STEEL
☐ STAINLESS STEEL

FAN SYSTEM


- ☐ PUSH-PULL SYSTEM (STANDARD)
☐ PUSH SYSTEM
☐ PULL SYSTEM
☐ NOT REQUIRED

FAN VOLTAGE/ HZ

- ☐ 115/60 (STANDARD)
☐ 230/60
☐ 12 VDC
☐ 24 VDC
☐ 48 VDC
☐ SPECIFY _____

ACCESSORIES AND OPTIONS

- ☐ REPLACEMENT FILTER

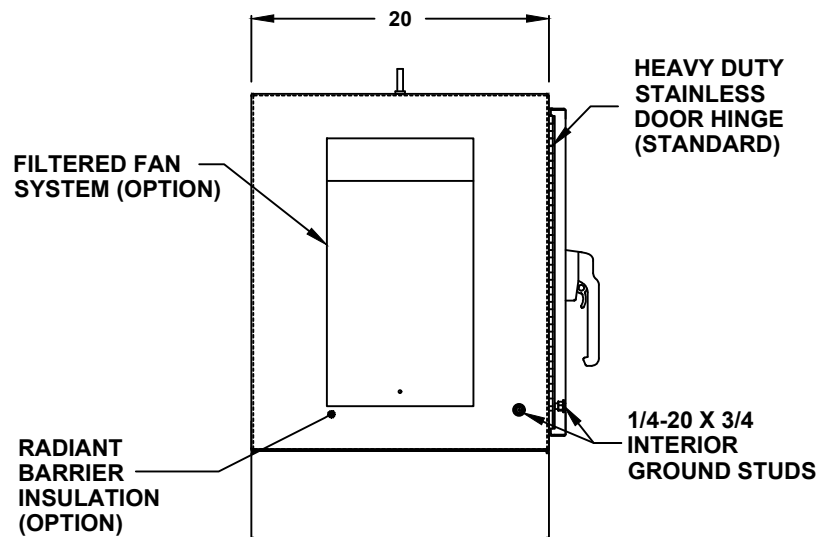

LEFT SIDE

SUN REFLECTIVE SOLUTION

- ☐ TOP SUNSHIELD COVER

ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)
☐ 3/4 RADIANT BARRIER
☐ 1 RADIANT BARRIER
☐ NOT REQUIRED


FAN SERVICE DOOR

- ☐ FAN SERVICE DOOR
☐ NOT REQUIRED


ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)
☐ 3/4 RADIANT BARRIER
☐ 1 RADIANT BARRIER
☐ NOT REQUIRED

24" H x 30" W x 20" D 1 DOOR DESIGN

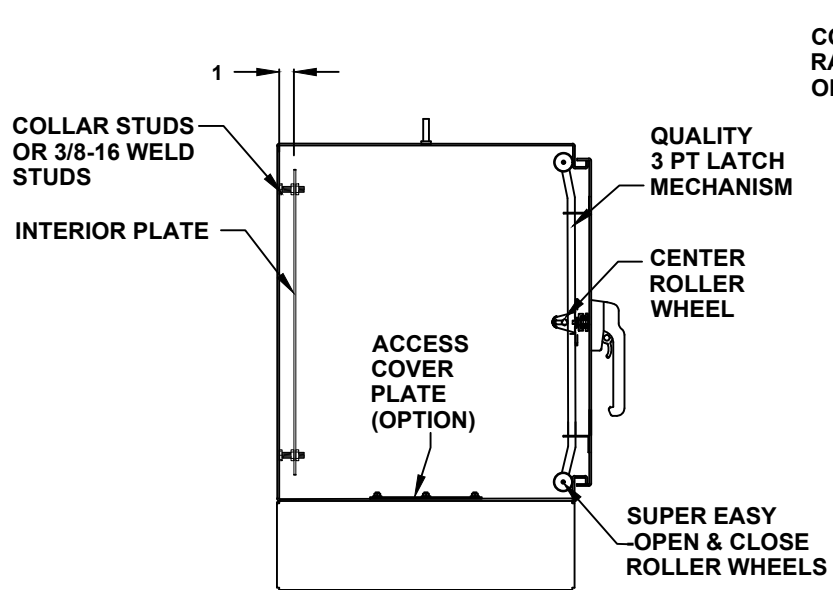

CROSS SECTION VIEW A-A

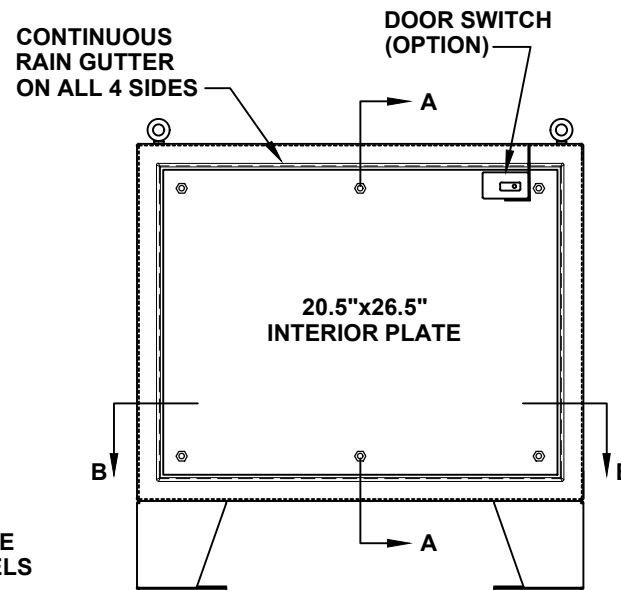

FRONT VIEW WITH DOOR REMOVED

DOOR ACCESSORIES

- ☐ DOOR SWITCH
- ☐ PRINT POCKET

INTERIOR PLATE

- ☐ COATED STEEL (IP2430-CS)
- ☐ COATED ALUMINUM (IP2430-AL)
- ☐ 304 STAINLESS STEEL (IP2430-S4)
- ☐ 316 STAINLESS STEEL (IP2430-S6)

24" H x 30" W x 20" D 1 DOOR DESIGN

- DOOR STOPPER**
- ☐ INSTALL DOOR STOPPER
- ☐ NOT REQUIRED

**BASE ACCESS COVER PLATE
(OPTION)**


- ☐ 8x8 PLATE (6x6 CUT-OUT)
- ☐ 8x16 PLATE (6x14 CUT-OUT)
- ☐ 12x12 PLATE (10x10 CUT-OUT)
- ☐ 16x16 PLATE (14x14 CUT-OUT)

CONDUIT/CABLE SEAL OPTIONS


- ☐ ROXTEC SEAL SOLUTION
- ☐ PIPE FITTING HUB
- ☐ CABLE GLAND

SIDE ACCESS COVER PLATE MAT'L

- ☐ POWDER COATED STEEL
- ☐ POWDER COATED ALUMINUM
- ☐ STAINLESS STEEL, 304

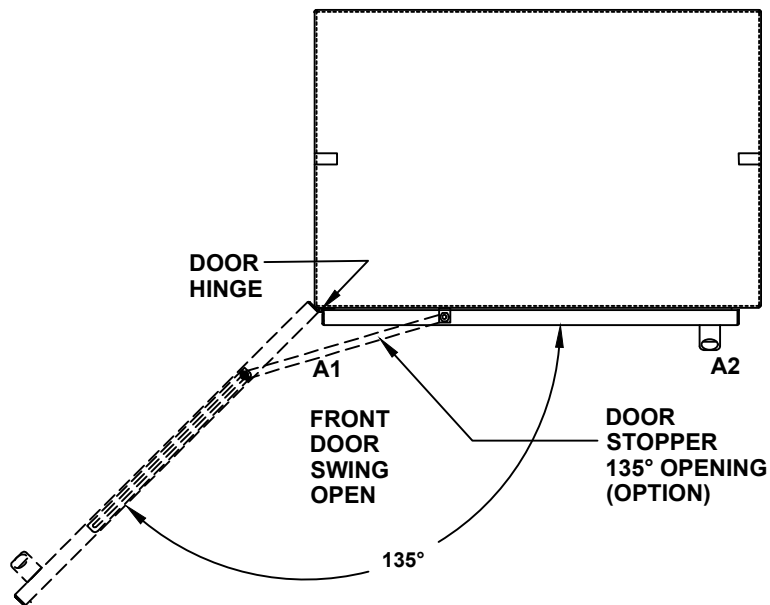

TOP VIEW

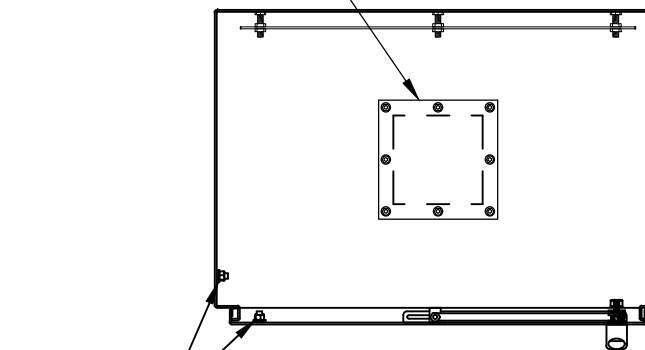


- 1/4-20 X 3/4
INTERIOR
GROUND STUDS**
- ☐ BONDING STRAPS

**QUAD OUTLET BOX
ON 8x8 PLATE (OPTION)**


- ☐ ADD QUAD BOX
- ☐ 15A 115V RECEPTACLE
- ☐ 20A 115V RECEPTACLE
- ☐ NOT REQUIRED

TOP CROSS SECTION VIEW B-B


24" H x 30" W x 20" D
1 DOOR DESIGN

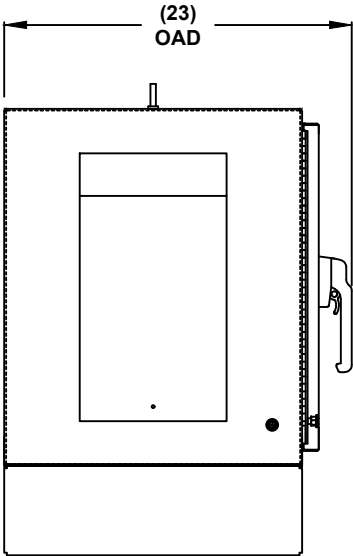

LEFT SIDE

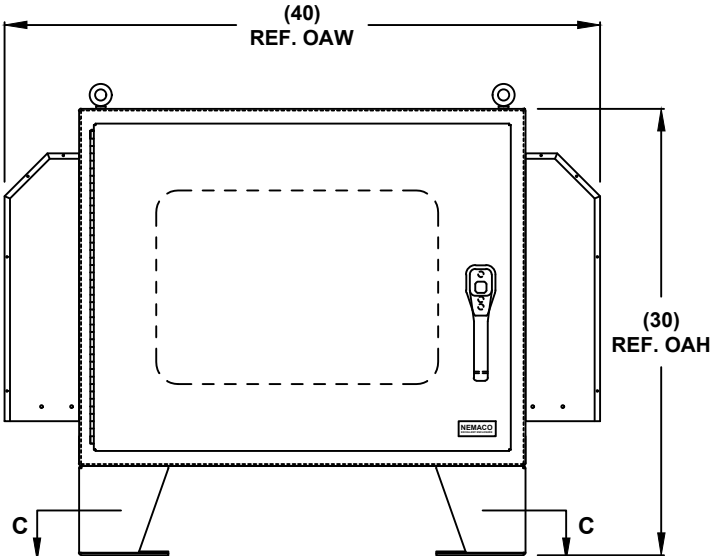

FRONT VIEW

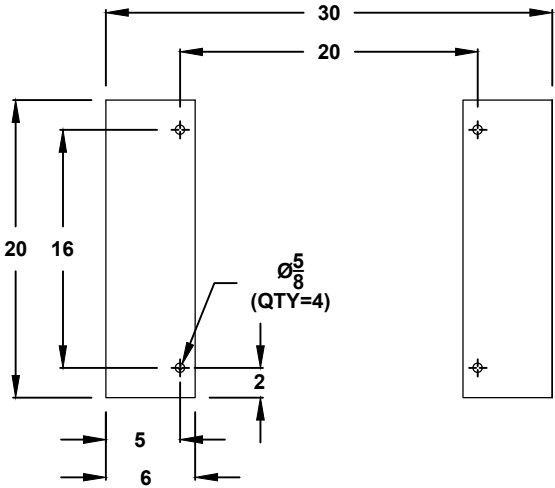

CROSS SECTION VIEW C-C
MOUNTING HOLES