

**NEMA 4X - ENCLOSURE  
ELECTRICAL CABINET  
FLOOR MOUNT**

**STAINLESS STEEL**

ENCLOSURE MATERIAL

- ☐ 304 STAINLESS STEEL (S4)  
☐ 316 STAINLESS STEEL (S6)

POWDERCOAT COLOR

- ☐ STANDARD WHITE  
☐ LIGHT GRAY ANSI 70  
☐ DARK GRAY ANSI 61  
☐ STANDARD BLACK  
☐ CUSTOM \_\_\_\_\_

FLOOR KIT

- ☐ 6" HT. (STANDARD)  
☐ 8" HT.  
☐ 10" HT.  
☐ 12" HT.  
☐ CUSTOM \_\_\_\_\_

FLOOR KIT OPTIONS

- ☐ FIXED FLOOR KIT  
☐ REMOVABLE FLOOR KIT


ALL DIMENSIONS ARE ESTIMATED IN INCHES  
AND MAY VARY DUE TO SELECTED OPTIONS.

COMPANY NAME \_\_\_\_\_

APPROVED (PRINTED NAME) \_\_\_\_\_

SIGNATURE \_\_\_\_\_

DATE \_\_\_\_\_

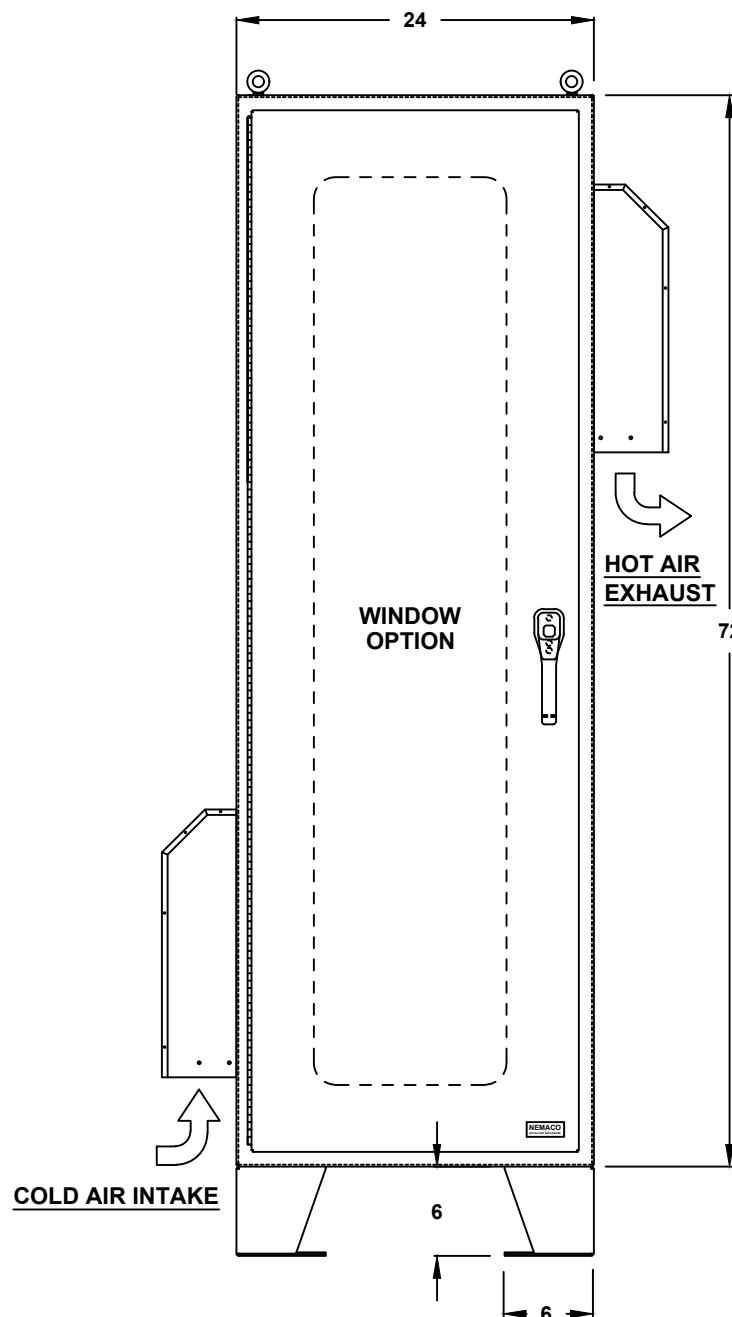

**FRONT VIEW**

**72" H x 24" W x 16" D  
1 DOOR DESIGN**



FILE NUMBER: E507642

LIFTING EYE

- ☐ WELDED PADS (STANDARD)  
☐ REMOVABLE PADEYES

DOOR HINGE

- ☐ PIANO HINGE  
☐ LIFT OFF HINGE

DOOR LATCH OPTIONS

- ☐ 3 PT. LATCH (STANDARD)  
☐ CLAMP SCREW WITH HASP

DOOR HANDLE

- ☐ PADLOCK PROVISION (STANDARD)  
☐ KEYLOCK (OPTION)

\*WINDOW OPTIONS

- ☐ TEMPERED GLASS  
☐ NOT REQUIRED

\*NOTE: UL & NON-UL OPTIONS  
AVAILABLE

# 72" H x 24" W x 16" D 1 DOOR DESIGN

## THERMAL SPECIFICATIONS

- ☐ OUTSIDE (AMBIENT) \_\_\_\_\_ °F
- ☐ INTERIOR TEMP. \_\_\_\_\_ °F
- ☐ HEAT LOAD (WATTS) \_\_\_\_\_
- ☐ SUN / SHADE \_\_\_\_\_

## FAN SERIES

- ☐ 60FL SERIES, 18" H (40-92 CFM)
- ☐ 180FL SERIES, 24" H (177-179 CFM)
- ☐ 225FL SERIES, 24" H (350 CFM)

## FAN MATERIALS

- ☐ BAKED POWDER STEEL
- ☐ STAINLESS STEEL

## FAN SYSTEM


- ☐ PUSH-PULL SYSTEM (STANDARD)
- ☐ PUSH SYSTEM
- ☐ PULL SYSTEM
- ☐ NOT REQUIRED

## FAN VOLTAGE/ HZ

- ☐ 115/60 (STANDARD)
- ☐ 230/60
- ☐ 12 VDC
- ☐ 24 VDC
- ☐ 48 VDC
- ☐ SPECIFY \_\_\_\_\_

## ACCESSORIES AND OPTIONS

- ☐ REPLACEMENT FILTER

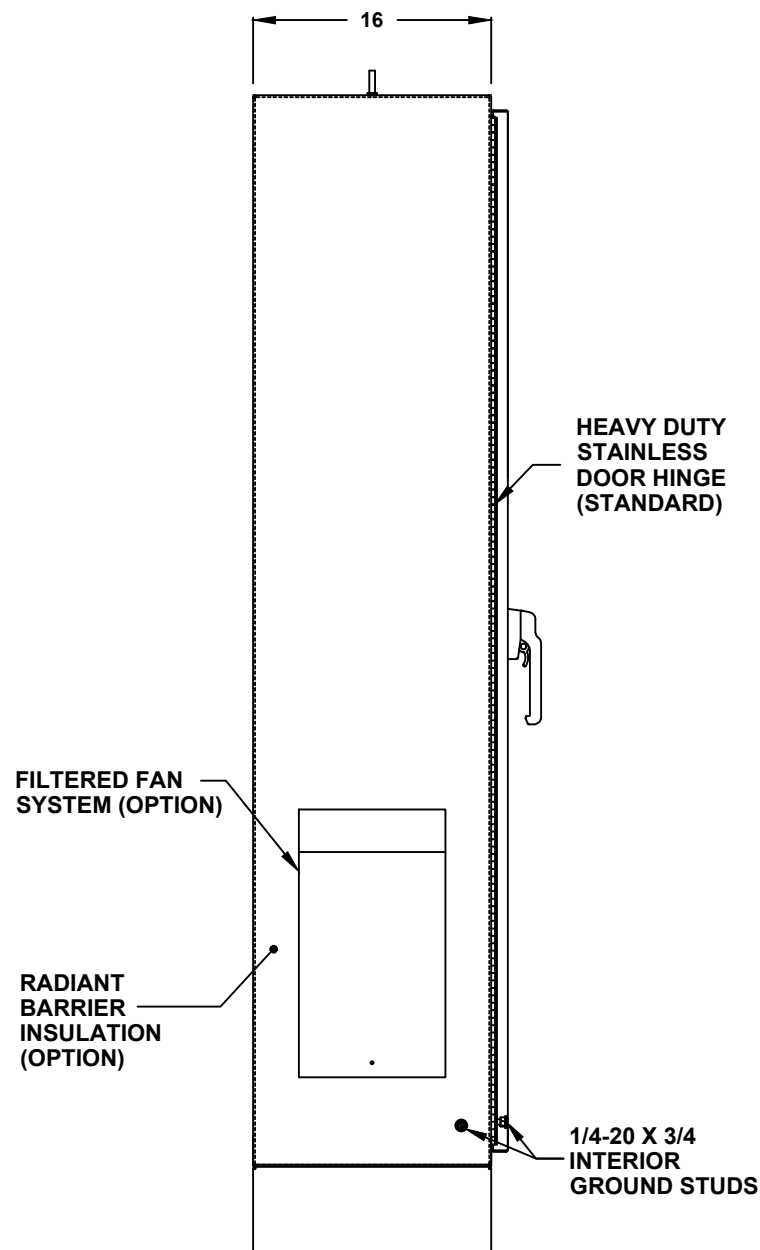

## SUN REFLECTIVE SOLUTION

- ☐ TOP SUNSHIELD COVER

## ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)
- ☐ 3/4 RADIANT BARRIER
- ☐ 1 RADIANT BARRIER
- ☐ NOT REQUIRED

## FAN SERVICE DOOR


- ☐ FAN SERVICE DOOR
- ☐ NOT REQUIRED

## ENCLOSURE INSULATION


- ☐ 1/2 RADIANT BARRIER (STANDARD)
- ☐ 3/4 RADIANT BARRIER
- ☐ 1 RADIANT BARRIER
- ☐ NOT REQUIRED

LEFT SIDE

# 72" H x 24" W x 16" D 1 DOOR DESIGN

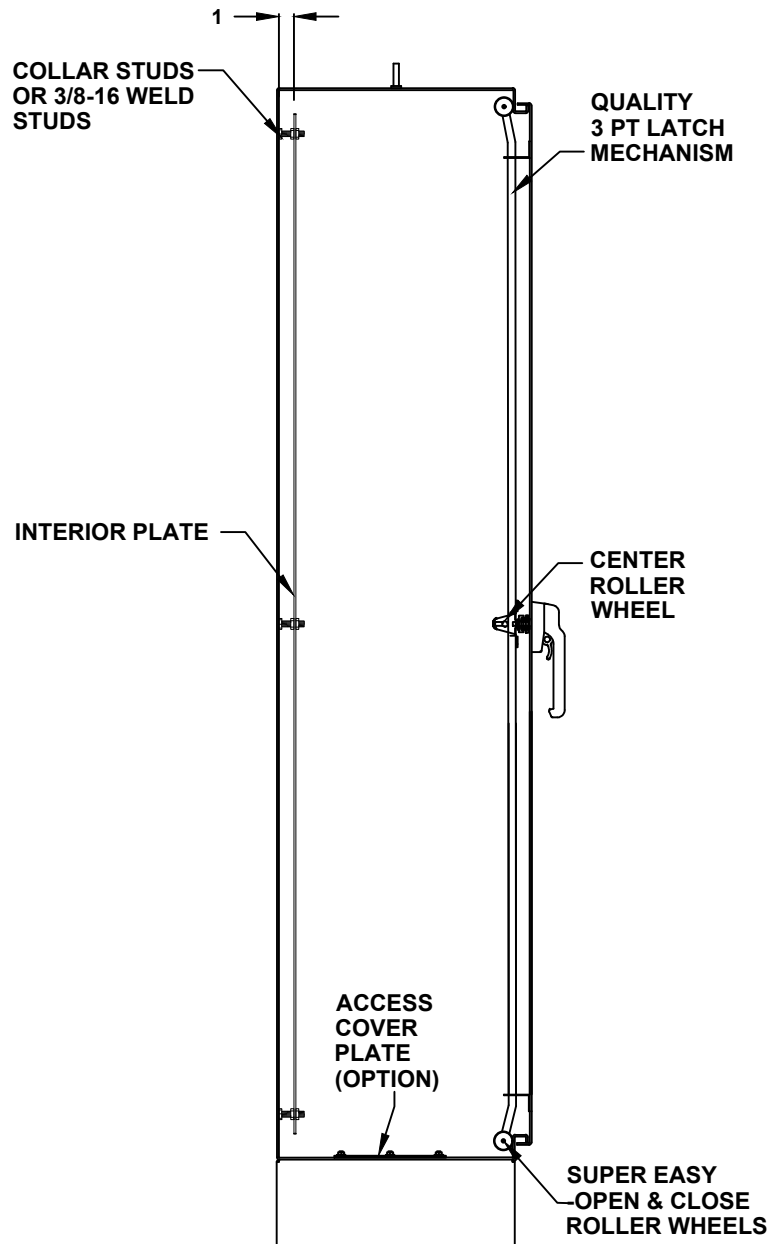

CROSS SECTION VIEW A-A

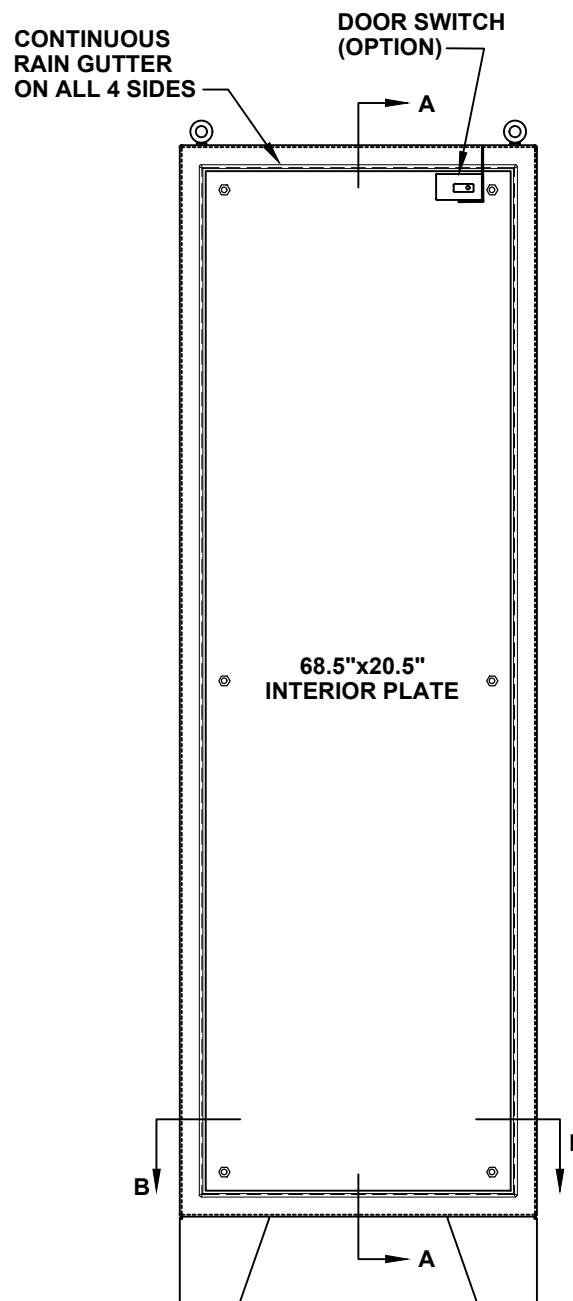

FRONT VIEW WITH DOOR REMOVED

## DOOR ACCESSORIES

- ☐ DOOR SWITCH
- ☐ PRINT POCKET


## INTERIOR PLATE

- ☐ COATED STEEL (IP7224-CS)
- ☐ COATED ALUMINUM (IP7224-AL)
- ☐ 304 STAINLESS STEEL (IP7224-S4)
- ☐ 316 STAINLESS STEEL (IP7224-S6)

# 72" H x 24" W x 16" D

## 1 DOOR DESIGN

- DOOR STOPPER**
- ☐ INSTALL DOOR STOPPER
- ☐ NOT REQUIRED

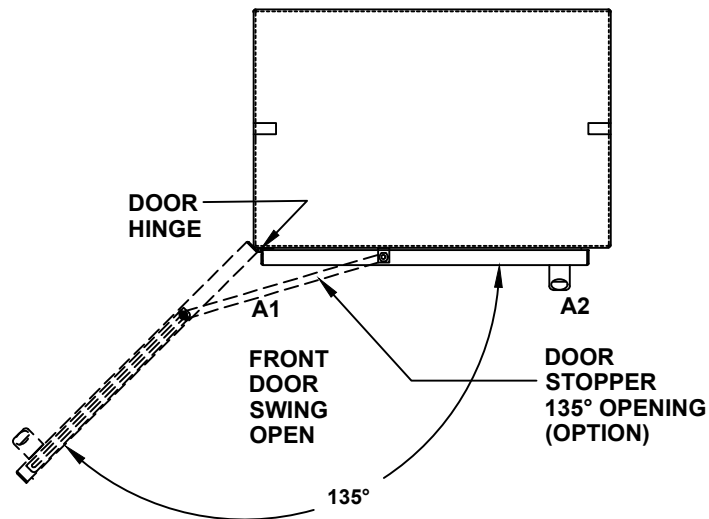

TOP VIEW

**BASE ACCESS COVER PLATE**  
(OPTION)


- ☐ 8x8 PLATE (6x6 CUT-OUT)
- ☐ 8x16 PLATE (6x14 CUT-OUT)
- ☐ 12x12 PLATE (10x10 CUT-OUT)
- ☐ 16x16 PLATE (14x14 CUT-OUT)

**CONDUIT/CABLE SEAL OPTIONS**

- ☐ ROXTEC SEAL SOLUTION
- ☐ PIPE FITTING HUB
- ☐ CABLE GLAND

**SIDE ACCESS COVER PLATE MAT'L**

- ☐ POWDER COATED STEEL
- ☐ POWDER COATED ALUMINUM
- ☐ STAINLESS STEEL, 304

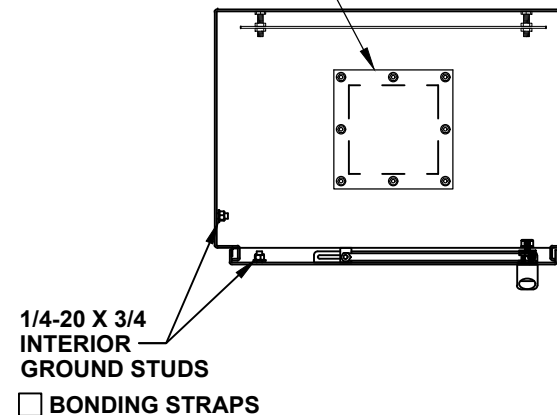


TOP CROSS SECTION VIEW B-B


**QUAD OUTLET BOX**  
ON 8x8 PLATE (OPTION)

- ☐ ADD QUAD BOX
- ☐ 15A 115V RECEPTACLE
- ☐ 20A 115V RECEPTACLE
- ☐ NOT REQUIRED


**72" H x 24" W x 16" D**  
**1 DOOR DESIGN**

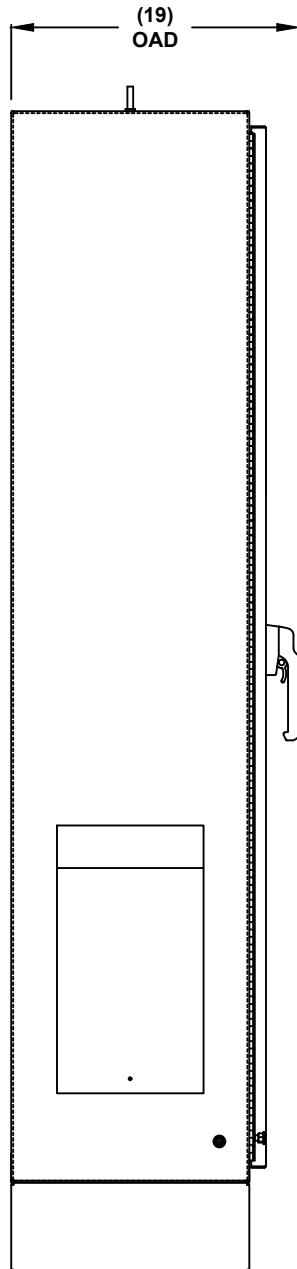

LEFT SIDE

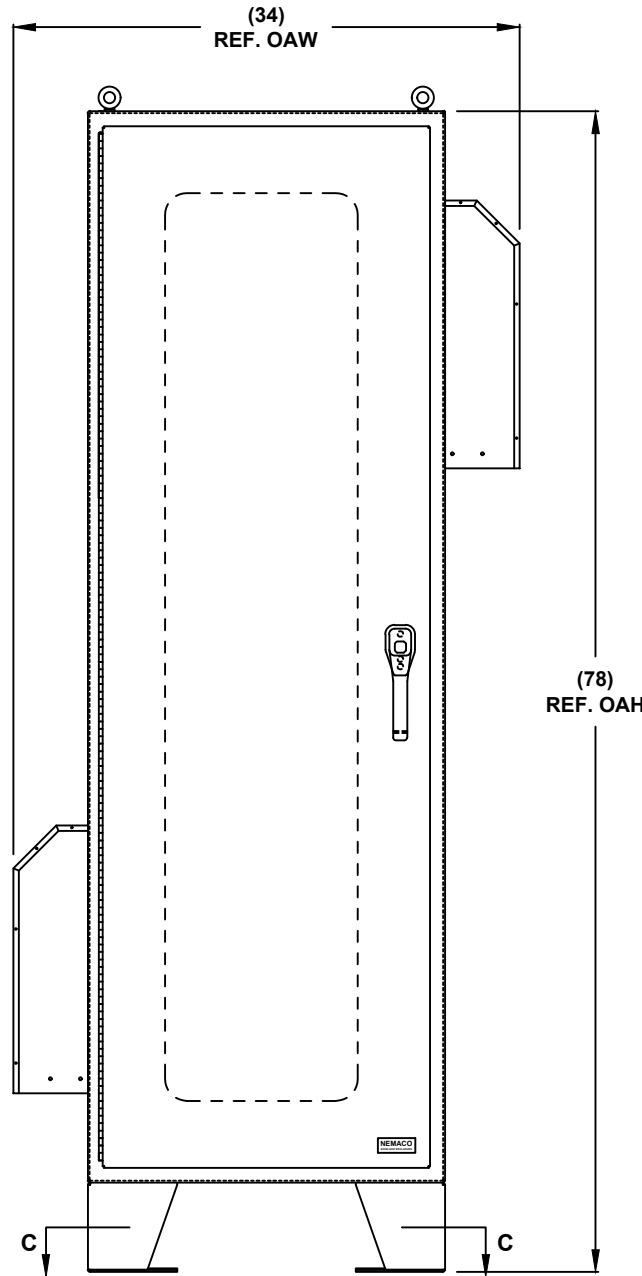

FRONT VIEW

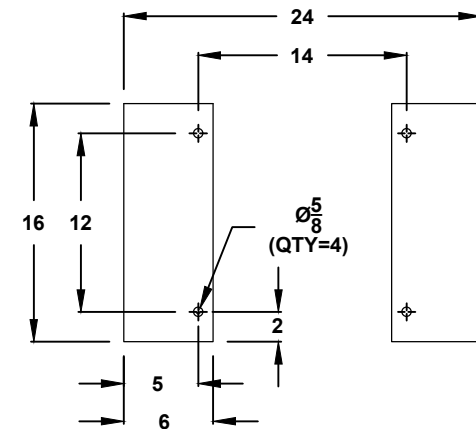

CROSS SECTION VIEW C-C  
MOUNTING HOLES