

**NEMA 4X - ENCLOSURE  
ELECTRICAL CABINET  
FLOOR MOUNT**

**STAINLESS STEEL**

ENCLOSURE MATERIAL

- ☐ 304 STAINLESS STEEL (S4)  
☐ 316 STAINLESS STEEL (S6)

POWDERCOAT COLOR

- ☐ STANDARD WHITE  
☐ LIGHT GRAY ANSI 70  
☐ DARK GRAY ANSI 61  
☐ STANDARD BLACK  
☐ CUSTOM \_\_\_\_\_

FLOOR KIT

- ☐ 6" HT. (STANDARD)  
☐ 8" HT.  
☐ 10" HT.  
☐ 12" HT.  
☐ CUSTOM \_\_\_\_\_

FLOOR KIT OPTIONS

- ☐ FIXED FLOOR KIT  
☐ REMOVABLE FLOOR KIT

ALL DIMENSIONS ARE ESTIMATED IN INCHES  
AND MAY VARY DUE TO SELECTED OPTIONS.


COMPANY NAME \_\_\_\_\_

APPROVED (PRINTED NAME) \_\_\_\_\_

SIGNATURE \_\_\_\_\_

DATE \_\_\_\_\_

**COLD AIR INTAKE**

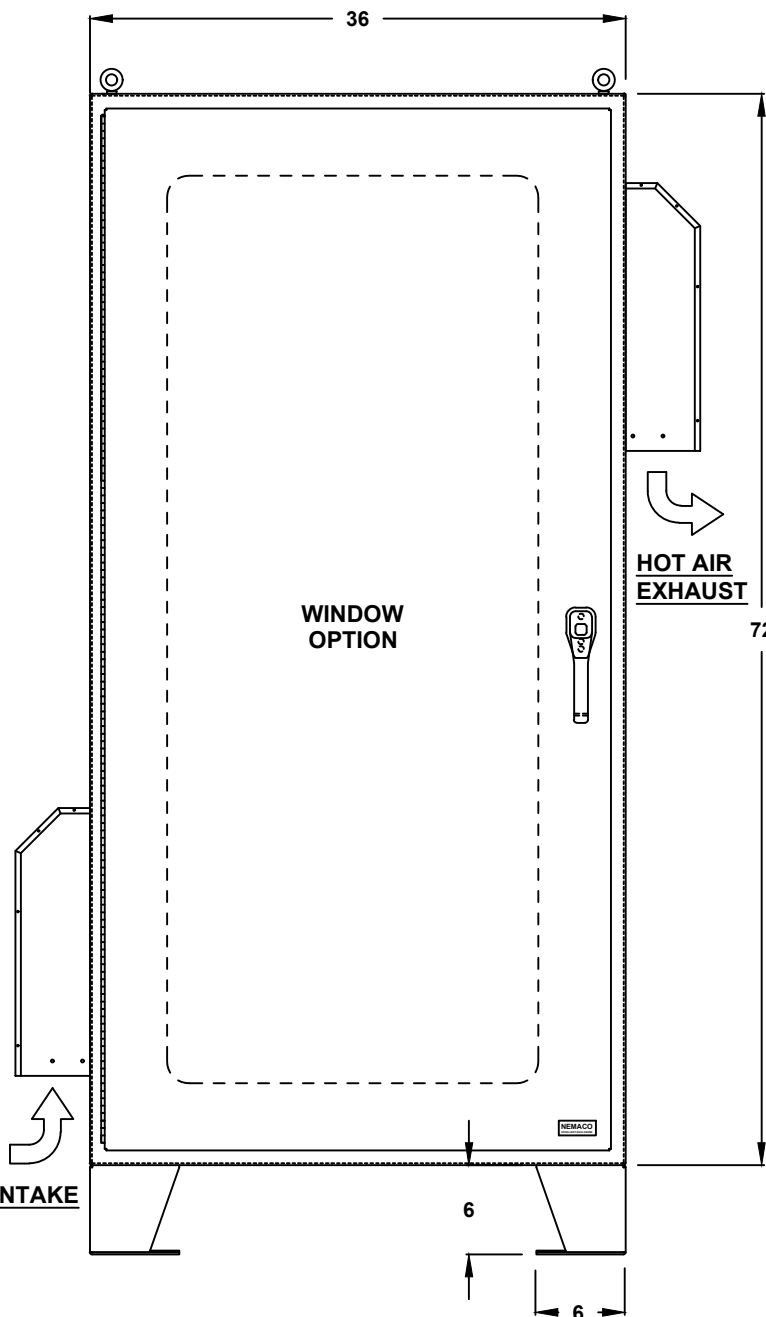

**FRONT VIEW**

**72" H x 36" W x 12" D  
1 DOOR DESIGN**



FILE NUMBER: E507642

LIFTING EYE

- ☐ WELDED PADS (STANDARD)  
☐ REMOVABLE PADEYES

DOOR HINGE

- ☐ PIANO HINGE  
☐ LIFT OFF HINGE

DOOR LATCH OPTIONS

- ☐ 3 PT. LATCH (STANDARD)  
☐ CLAMP SCREW WITH HASP

DOOR HANDLE

- ☐ PADLOCK PROVISION (STANDARD)  
☐ KEYLOCK (OPTION)

\*WINDOW OPTIONS

- ☐ TEMPERED GLASS  
☐ NOT REQUIRED

\*NOTE: UL & NON-UL OPTIONS  
AVAILABLE

# 72" H x 36" W x 12" D

## 1 DOOR DESIGN

### THERMAL SPECIFICATIONS

- ☐ OUTSIDE (AMBIENT) \_\_\_\_\_ °F  
☐ INTERIOR TEMP. \_\_\_\_\_ °F  
☐ HEAT LOAD (WATTS) \_\_\_\_\_  
☐ SUN / SHADE \_\_\_\_\_

### FAN SERIES

- ☐ 60FL SERIES, 18" H (40-92 CFM)  
☐ 180FL SERIES, 24" H (177-179 CFM)  
☐ 225FL SERIES, 24" H (350 CFM)

### FAN MATERIALS

- ☐ BAKED POWDER STEEL  
☐ STAINLESS STEEL

### FAN SYSTEM


- ☐ PUSH-PULL SYSTEM (STANDARD)  
☐ PUSH SYSTEM  
☐ PULL SYSTEM  
☐ NOT REQUIRED

### FAN VOLTAGE/ HZ

- ☐ 115/60 (STANDARD)  
☐ 230/60  
☐ 12 VDC  
☐ 24 VDC  
☐ 48 VDC  
☐ SPECIFY \_\_\_\_\_

### ACCESSORIES AND OPTIONS

- ☐ REPLACEMENT FILTER

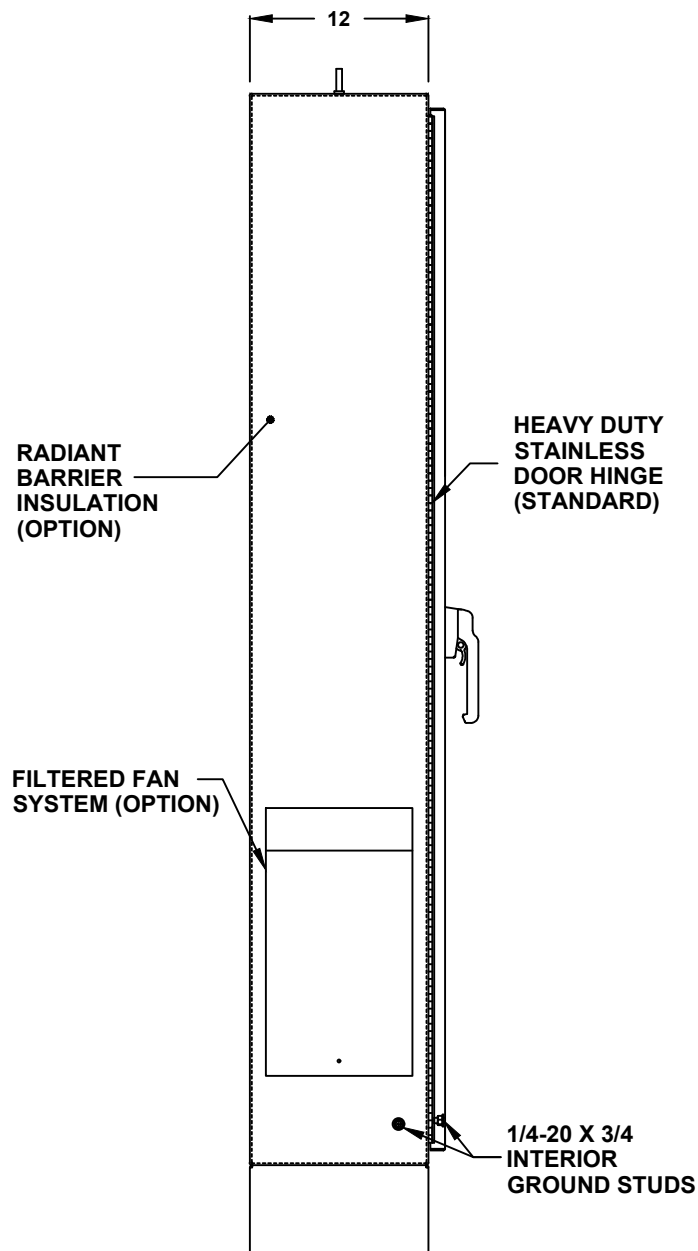

LEFT SIDE

### SUN REFLECTIVE SOLUTION

- ☐ TOP SUNSHIELD COVER

### ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)  
☐ 3/4 RADIANT BARRIER  
☐ 1 RADIANT BARRIER  
☐ NOT REQUIRED


### FAN SERVICE DOOR

- ☐ FAN SERVICE DOOR  
☐ NOT REQUIRED


### ENCLOSURE INSULATION

- ☐ 1/2 RADIANT BARRIER (STANDARD)  
☐ 3/4 RADIANT BARRIER  
☐ 1 RADIANT BARRIER  
☐ NOT REQUIRED

**72" H x 36" W x 12" D**  
**1 DOOR DESIGN**

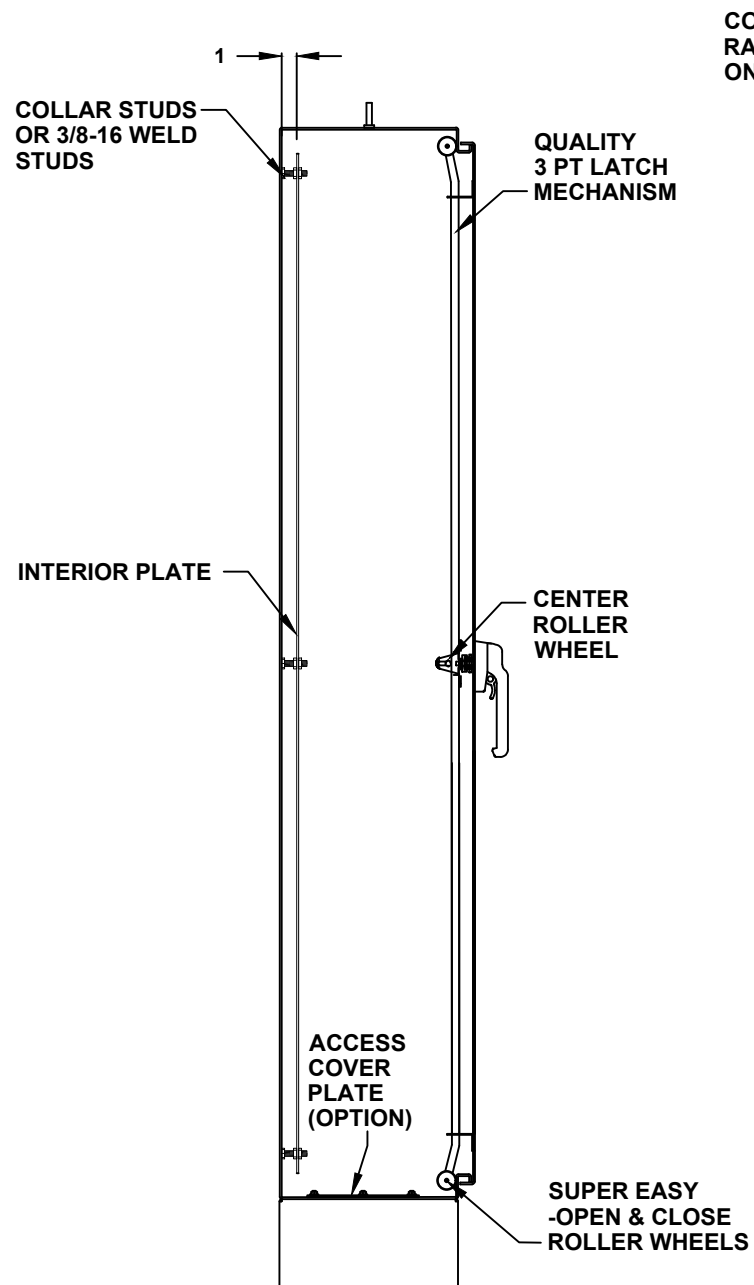

CROSS SECTION VIEW A-A

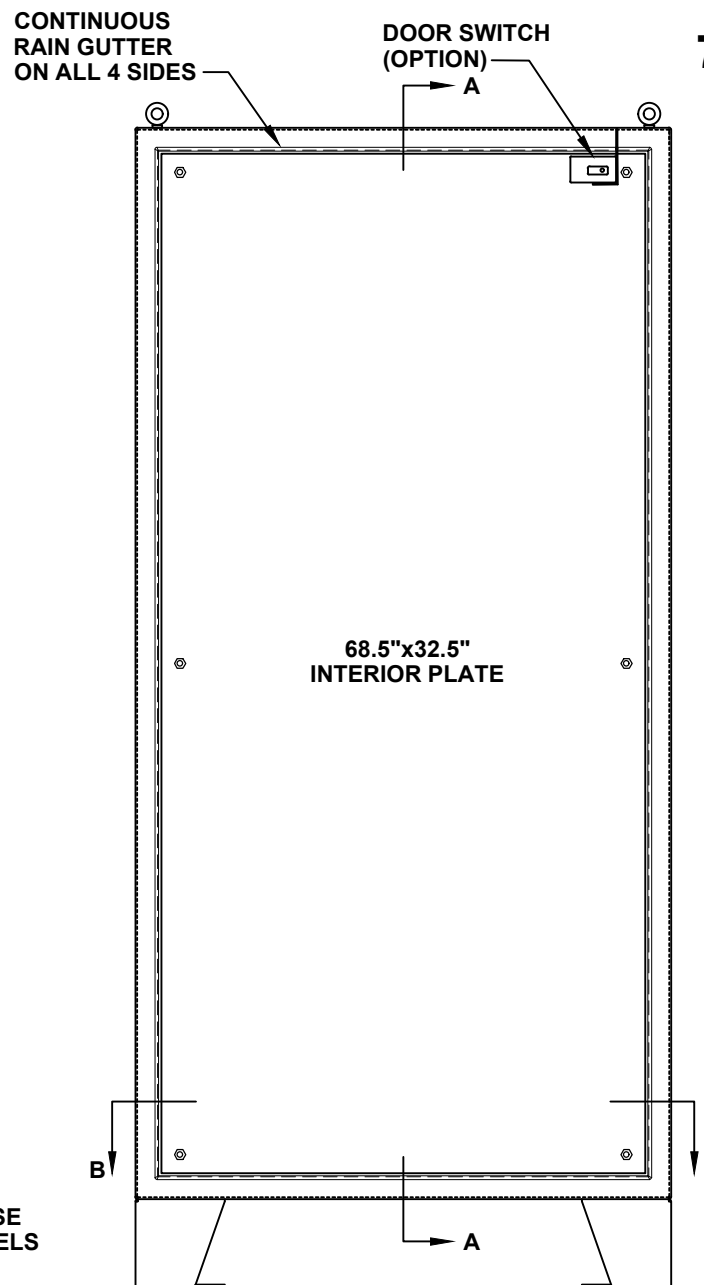

FRONT VIEW WITH DOOR REMOVED

DOOR ACCESSORIES

- ☐ DOOR SWITCH
- ☐ PRINT POCKET

INTERIOR PLATE

- ☐ COATED STEEL (IP7236-CS)
- ☐ COATED ALUMINUM (IP7236-AL)
- ☐ 304 STAINLESS STEEL (IP7236-S4)
- ☐ 316 STAINLESS STEEL (IP7236-S6)

# 72" H x 36" W x 12" D

## 1 DOOR DESIGN

**DOOR STOPPER**

- ☐ INSTALL DOOR STOPPER  
☐ NOT REQUIRED

**BASE ACCESS COVER PLATE  
(OPTION)**



- ☐ 8x8 PLATE (6x6 CUT-OUT)  
☐ 8x16 PLATE (6x14 CUT-OUT)  
☐ 12x12 PLATE (10x10 CUT-OUT)  
☐ 16x16 PLATE (14x14 CUT-OUT)

**CONDUIT/CABLE SEAL OPTIONS**

- ☐ ROXTEC SEAL SOLUTION  
☐ PIPE FITTING HUB  
☐ CABLE GLAND


**SIDE ACCESS COVER PLATE MAT'L**

- ☐ POWDER COATED STEEL  
☐ POWDER COATED ALUMINUM  
☐ STAINLESS STEEL, 304

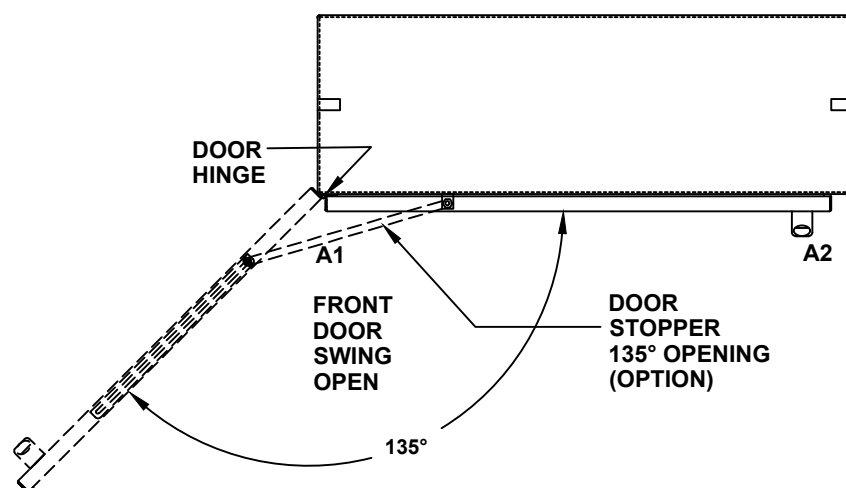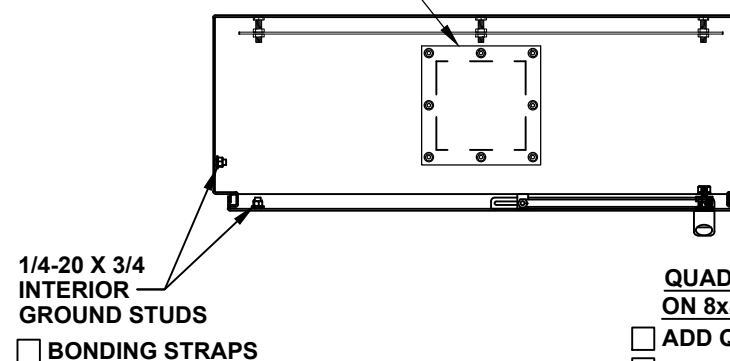
**TOP VIEW****TOP CROSS SECTION VIEW B-B****QUAD OUTLET BOX  
ON 8x8 PLATE (OPTION)**

- ☐ ADD QUAD BOX  
☐ 15A 115V RECEPTACLE  
☐ 20A 115V RECEPTACLE  
☐ NOT REQUIRED


**72" H x 36" W x 12" D**  
**1 DOOR DESIGN**

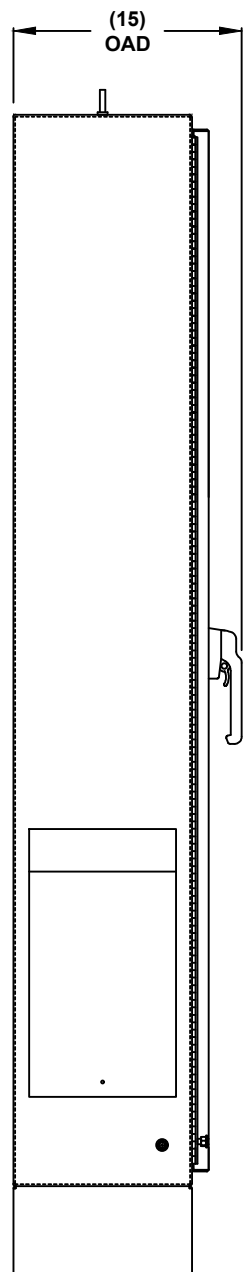

LEFT SIDE

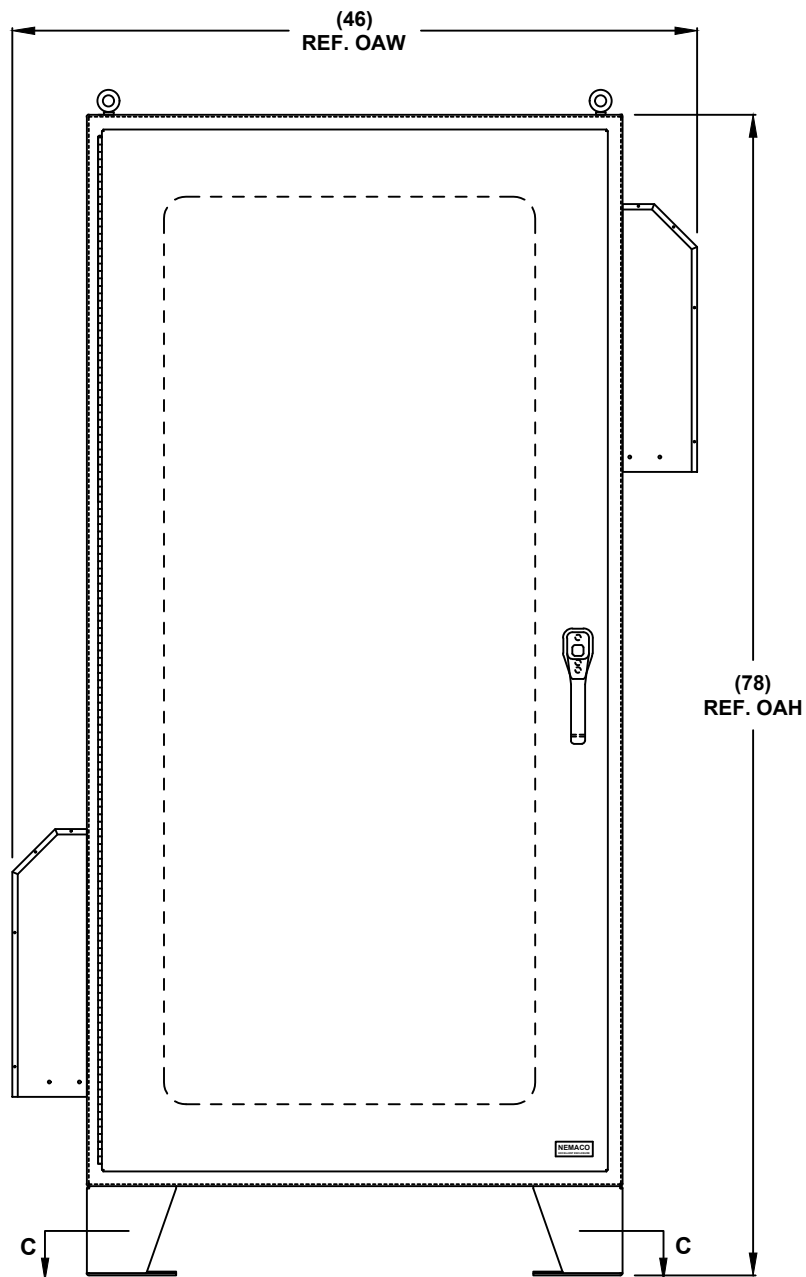

FRONT VIEW

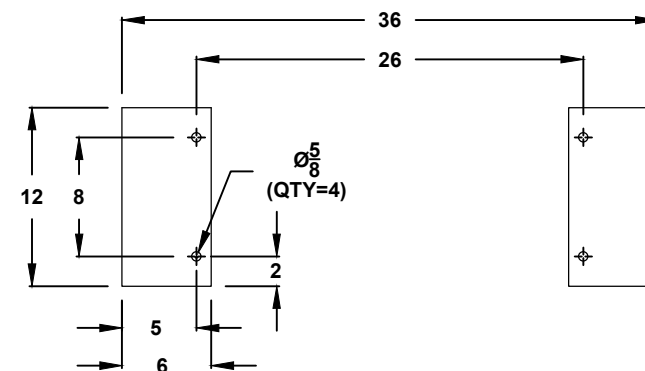

CROSS SECTION VIEW C-C  
MOUNTING HOLES