

# 48" H x 24" W x 16" D 1 DOOR DESIGN



FILE NUMBER: E507642

NEMA 4X - ENCLOSURE  
ELECTRICAL CABINET  
FREE STANDING

## STAINLESS STEEL

### ENCLOSURE MATERIAL

- ☐ 304 STAINLESS STEEL (S4)
- ☐ 316 STAINLESS STEEL (S6)

### POWDERCOAT COLOR


- ☐ STANDARD WHITE
- ☐ LIGHT GRAY ANSI 70
- ☐ DARK GRAY ANSI 61
- ☐ STANDARD BLACK
- ☐ CUSTOM \_\_\_\_\_

### BASE EXTENSION

- ☐ 2" BASE EXTENSION
- ☐ 4" BASE EXTENSION
- ☐ 6" BASE EXTENSION
- ☐ 12" BASE EXTENSION
- ☐ NOT REQUIRED

### EXTERIOR MOUNTING

- ☐ EXTERIOR MOUNTING BRACKETS (STANDARD)
- ☐ NOT REQUIRED

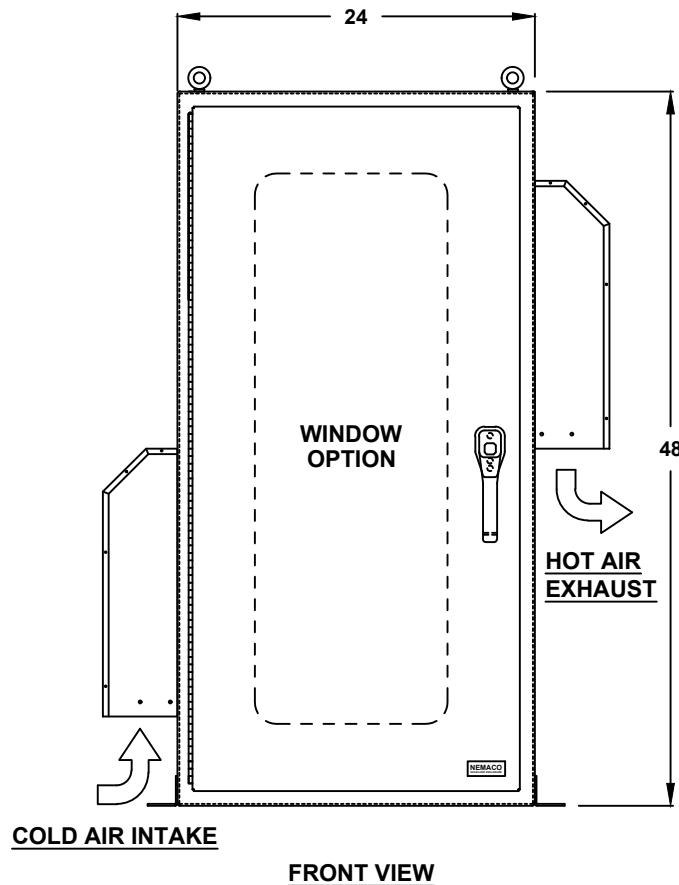

FRONT VIEW

### LIFTING EYE

- ☐ WELDED PADS (STANDARD)
- ☐ REMOVABLE PADEYES

### DOOR HINGE

- ☐ PIANO HINGE
- ☐ LIFT OFF HINGE

### DOOR LATCH OPTIONS

- ☐ 3 PT. LATCH (STANDARD)
- ☐ CLAMP SCREW WITH HASP

### DOOR HANDLE

- ☐ PADLOCK PROVISION (STANDARD)
- ☐ KEYLOCK (OPTION)

### \*WINDOW OPTIONS

- ☐ TEMPERED GLASS
- ☐ NOT REQUIRED

ALL DIMENSIONS ARE ESTIMATED IN INCHES  
AND MAY VARY DUE TO SELECTED OPTIONS.

COMPANY NAME \_\_\_\_\_

APPROVED (PRINTED NAME) \_\_\_\_\_

SIGNATURE \_\_\_\_\_

DATE \_\_\_\_\_

# 48" H x 24" W x 16" D

## 1 DOOR DESIGN

**THERMAL SPECIFICATIONS**

- ☐ OUTSIDE (AMBIENT) \_\_\_\_\_ °F  
☐ INTERIOR TEMP. \_\_\_\_\_ °F  
☐ HEAT LOAD (WATTS) \_\_\_\_\_  
☐ SUN / SHADE \_\_\_\_\_

**FAN SERIES**

- ☐ 60FL SERIES, 18" H (40-92 CFM)  
☐ 180FL SERIES, 24" H (177-179 CFM)  
☐ 225FL SERIES, 24" H (350 CFM)

**FAN MATERIALS**

- ☐ BAKED POWDER STEEL  
☐ STAINLESS STEEL

**FAN SYSTEM**


- ☐ PUSH-PULL SYSTEM (STANDARD)  
☐ PUSH SYSTEM  
☐ PULL SYSTEM  
☐ NOT REQUIRED

**FAN VOLTAGE/ HZ**

- ☐ 115/60 (STANDARD)  
☐ 230/60  
☐ 12 VDC  
☐ 24 VDC  
☐ 48 VDC  
☐ SPECIFY \_\_\_\_\_

**ACCESSORIES AND OPTIONS**

- ☐ REPLACEMENT FILTER

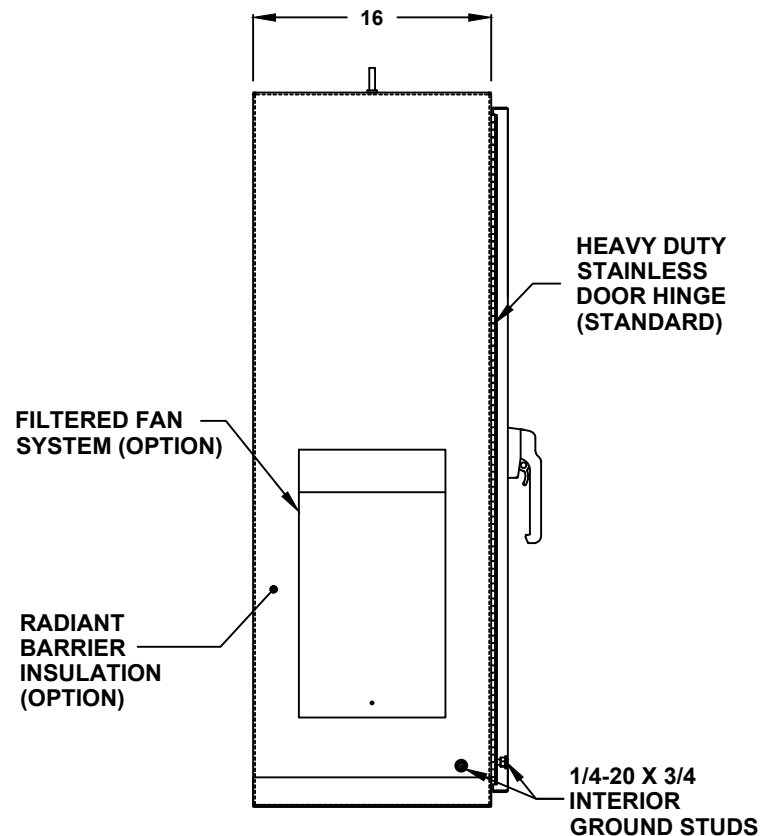**LEFT SIDE****SUN REFLECTIVE SOLUTION**

- ☐ TOP SUNSHIELD COVER

**ENCLOSURE INSULATION**

- ☐ 1/2 RADIANT BARRIER (STANDARD)  
☐ 3/4 RADIANT BARRIER  
☐ 1 RADIANT BARRIER  
☐ NOT REQUIRED

**FAN SERVICE DOOR**



- ☐ FAN SERVICE DOOR  
☐ NOT REQUIRED

**ENCLOSURE INSULATION**

- ☐ 1/2 RADIANT BARRIER (STANDARD)  
☐ 3/4 RADIANT BARRIER  
☐ 1 RADIANT BARRIER  
☐ NOT REQUIRED

# 48" H x 24" W x 16" D

## 1 DOOR DESIGN

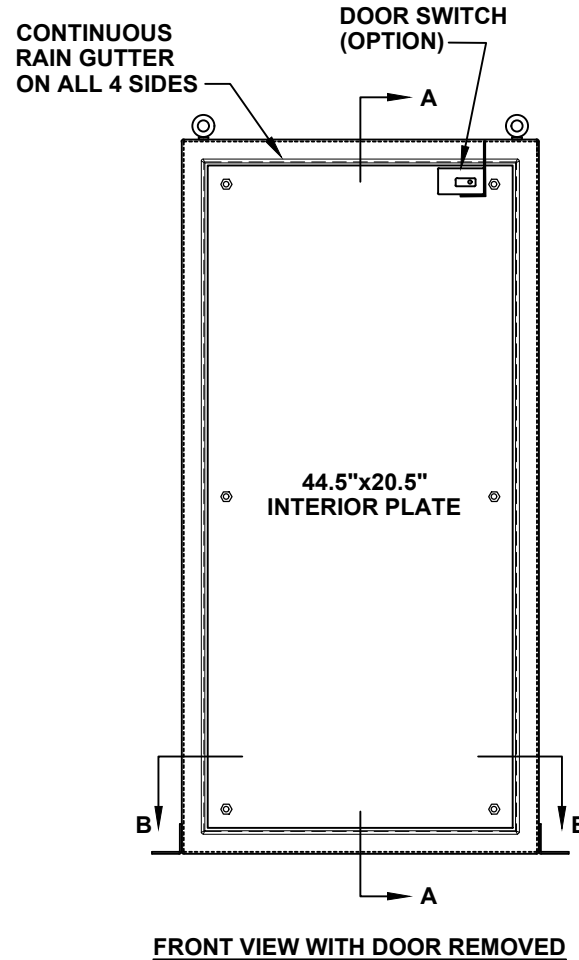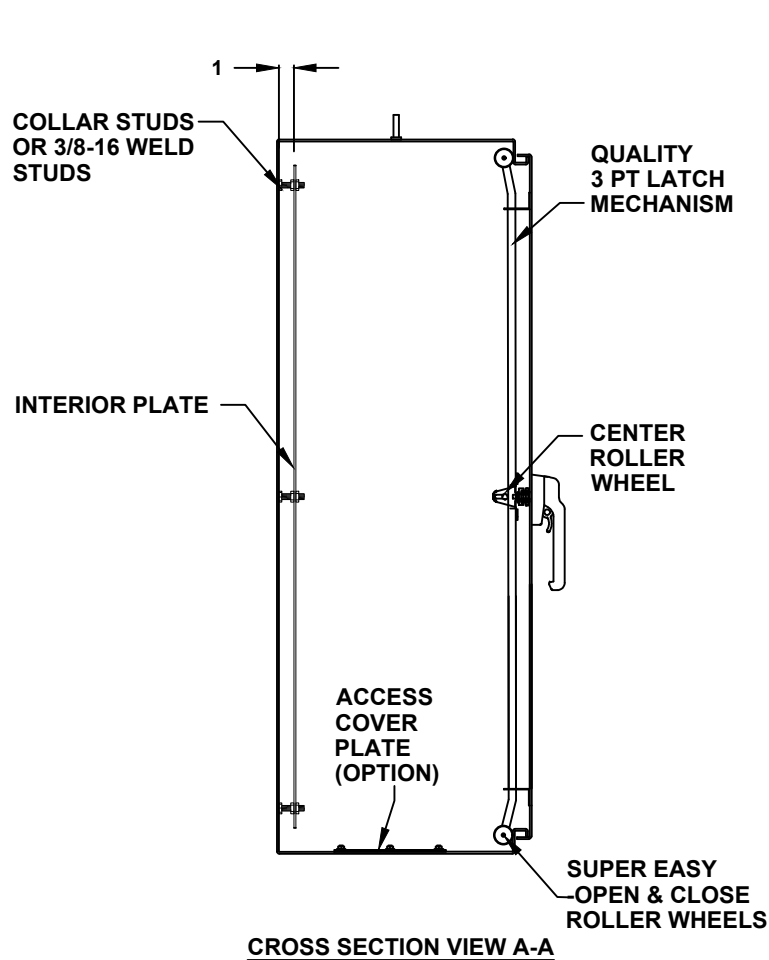

### DOOR ACCESSORIES

- ☐ DOOR SWITCH
- ☐ PRINT POCKET

### INTERIOR PLATE

- ☐ COATED STEEL (IP4824-CS)
- ☐ COATED ALUMINUM (IP4824-AL)
- ☐ 304 STAINLESS STEEL (IP4824-S4)
- ☐ 316 STAINLESS STEEL (IP4824-S6)

# 48" H x 24" W x 16" D

## 1 DOOR DESIGN

**DOOR STOPPER**

- ☐ INSTALL DOOR STOPPER  
☐ NOT REQUIRED

**BASE ACCESS COVER PLATE  
 (OPTION)**



- ☐ 8x8 PLATE (6x6 CUT-OUT)  
☐ 8x16 PLATE (6x14 CUT-OUT)  
☐ 12x12 PLATE (10x10 CUT-OUT)  
☐ 16x16 PLATE (14x14 CUT-OUT)

**CONDUIT/CABLE SEAL OPTIONS**

- ☐ ROXTEC SEAL SOLUTION  
☐ PIPE FITTING HUB  
☐ CABLE GLAND


**SIDE ACCESS COVER PLATE MAT'L**

- ☐ POWDER COATED STEEL  
☐ POWDER COATED ALUMINUM  
☐ STAINLESS STEEL, 304

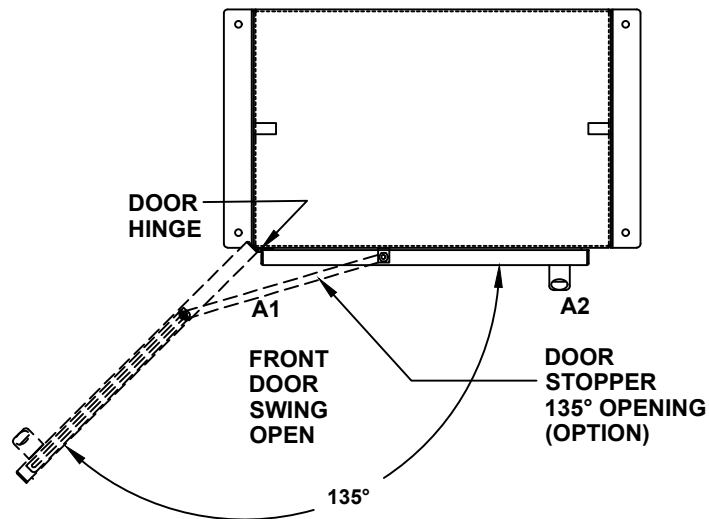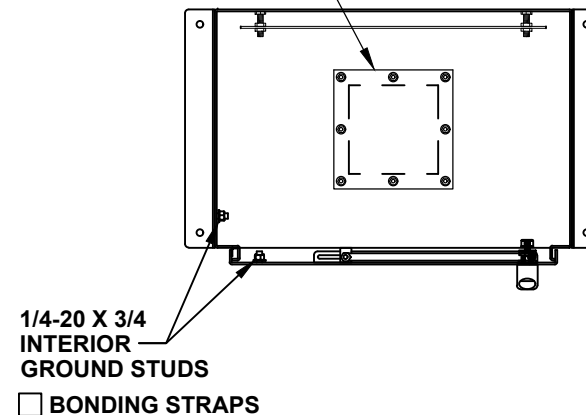
**TOP VIEW****TOP CROSS SECTION VIEW B-B**
**QUAD OUTLET BOX  
 ON 8x8 PLATE (OPTION)**

- ☐ ADD QUAD BOX  
☐ 15A 115V RECEPTACLE  
☐ 20A 115V RECEPTACLE  
☐ NOT REQUIRED


48" H x 24" W x 16" D  
1 DOOR DESIGN

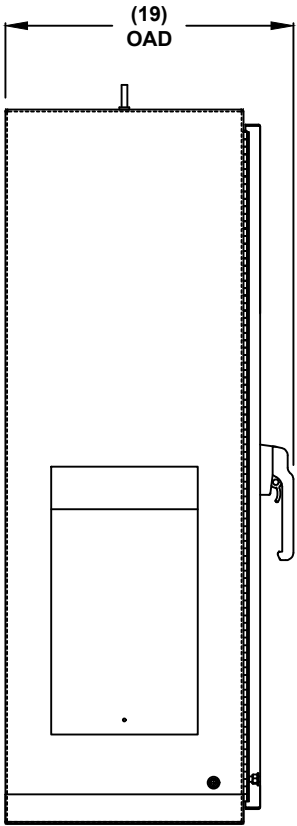

LEFT SIDE

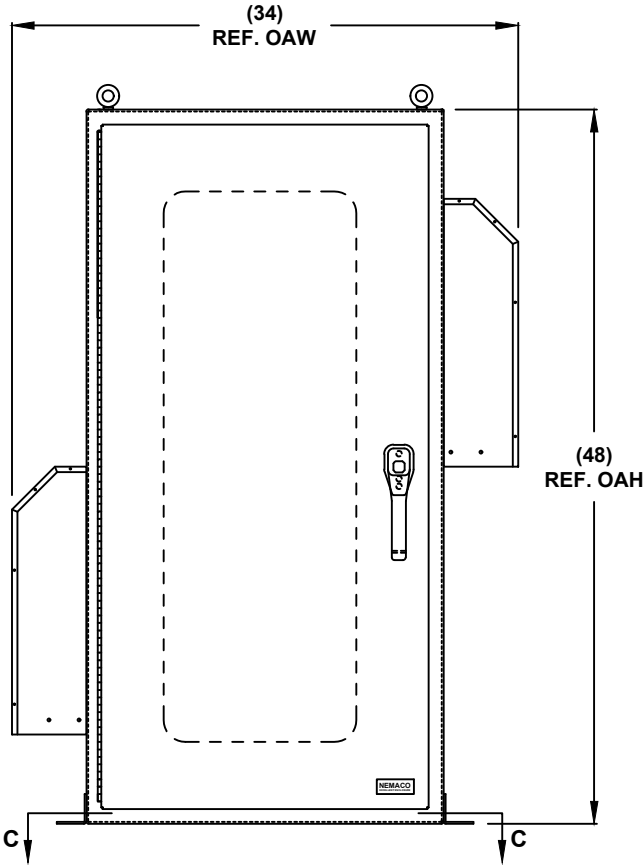

FRONT VIEW

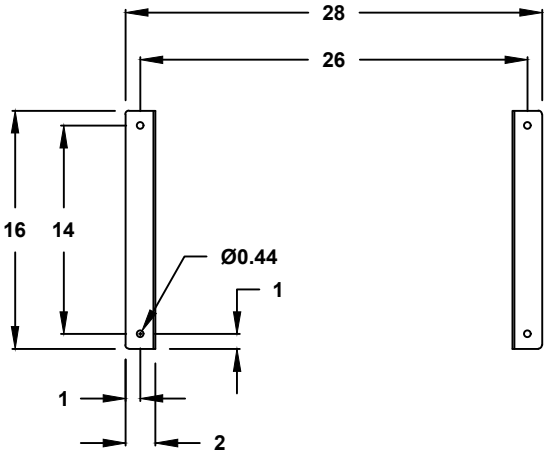

CROSS SECTION VIEW C-C  
MOUNTING HOLES