

NEMA 6P ECO SERIES 16" H x 16" W x 6" D 1 DOOR DESIGN

NEMA 6P - ENCLOSURE
WALL MOUNT
STAINLESS STEEL



FILE NUMBER: E496085

ENCLOSURE MATERIAL

- 304 STAINLESS STEEL (S4)
- 316 STAINLESS STEEL (S6)

ENCLOSURE POWDER COAT

- WHITE
- ANSI 61 GRAY
- ANSI 70 LIGHT GRAY
- BLACK
- NOT REQUIRED

CORROSION PACKAGE


- EXTERIOR PASSIVATION
- FULL PASSIVATION

6P COVER OPTION

- N6P FLOATING HINGES
- LIFT OFF PULL HANDLES
- WINDOW KIT (NON-UL)
- 135 DEGREE DOOR STOPPER

STANDARD STAINLESS PASSIVATION CLEANING
SUBMERSION PERFORMANCE TEST: 24 HR. @15 FT.
ISO17025 INSTRUMENTATION AND EQUIPMENT

COMPANY NAME	
APPROVED (PRINTED NAME)	
SIGNATURE	DATE


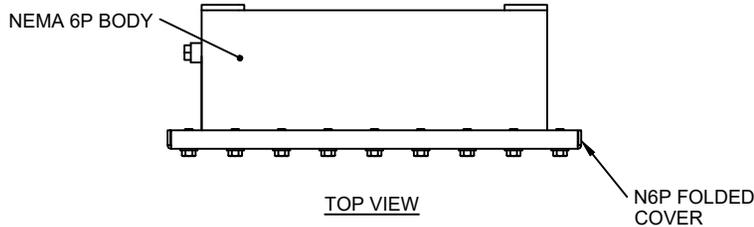


LIFTING EYES

- WELDED PADEYES
- NOT REQUIRED

CONDUIT/CABLE SOLUTION

- FNPT HUB
- CABLE GLAND
- ROXTEC SEALS

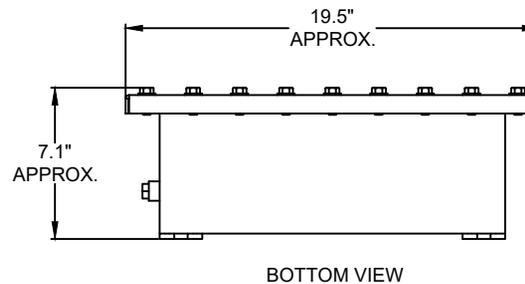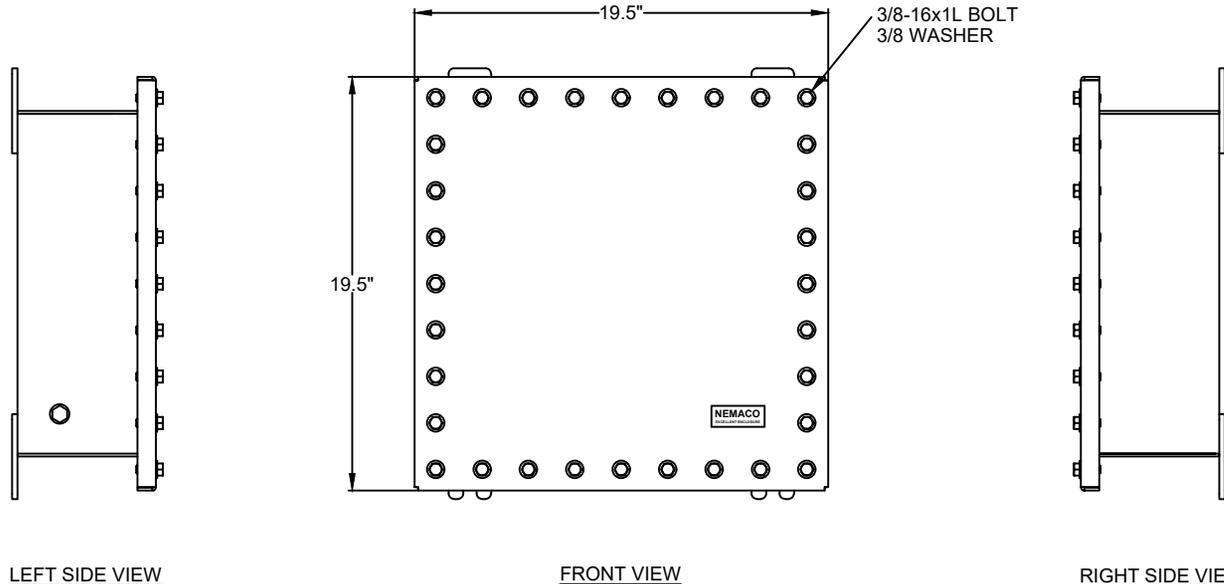



COVER GASKET OPTION

- UL RECOGNIZED SILICONE
- EPDM (NON-UL)
- VITON (NON-UL)
- BUNA-N (NON-UL)

PAPER SIZE: LETTER
SCALE: 1:9

N6P161606-W1DECXX (X1) 1/2

NEMA 6P ECO SERIES 16" H x 16" W x 6" D 1 DOOR DESIGN

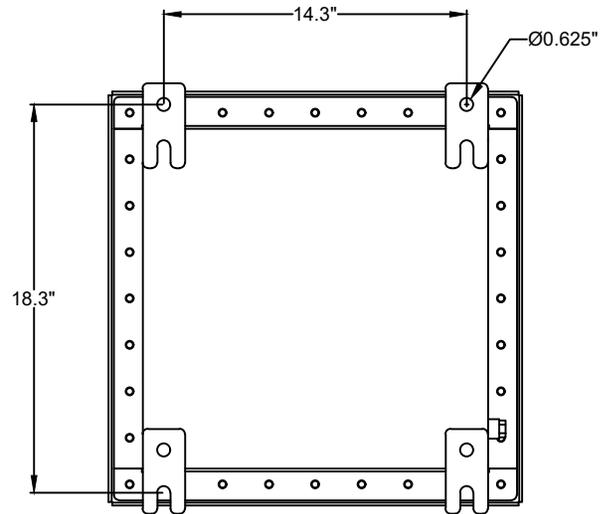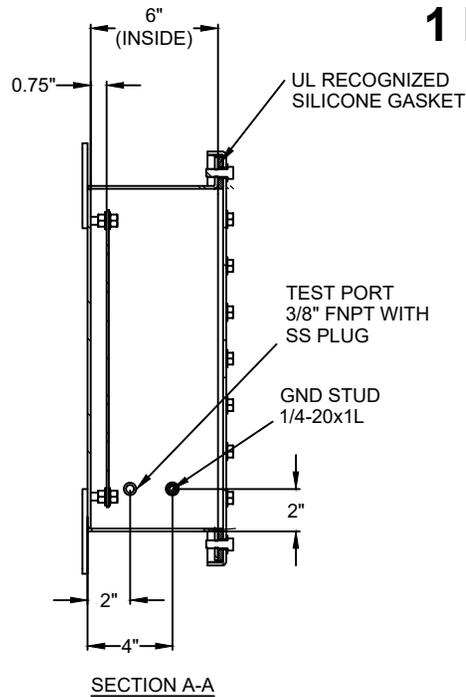

INTERIOR PLATE


- COATED STEEL (I6P1616-CS)
- COATED ALUMINUM (I6P1616-AL)
- 304 STAINLESS STEEL (I6P1616-S4)
- 316 STAINLESS STEEL (I6P1616-S6)

WATER SUBMERSION DEPTH

- 15FT. SUBMERSION (STANDARD)
- 30FT. SUBMERSION
- 60FT. SUBMERSION
- 100FT. SUBMERSION

TEST DURATION

- 24HR. (STANDARD)
- 36HR.
- 72HR.

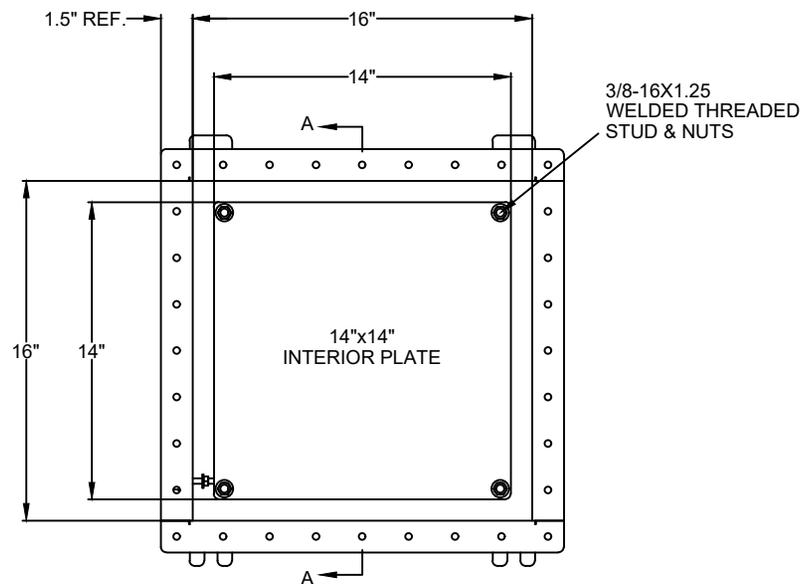

COVER REMOVED FOR CLARITY

N6P161606-W1DECXX (X1)