

NEMA 6P ECO SERIES 16" H x 16" W x 12" D 1 DOOR DESIGN

NEMA 6P - ENCLOSURE
WALL MOUNT
STAINLESS STEEL



FILE NUMBER: E496085

ENCLOSURE MATERIAL

- 304 STAINLESS STEEL (S4)
- 316 STAINLESS STEEL (S6)

ENCLOSURE POWDER COAT

- WHITE
- ANSI 61 GRAY
- ANSI 70 LIGHT GRAY
- BLACK
- NOT REQUIRED






CORROSION PACKAGE

- EXTERIOR PASSIVATION
- FULL PASSIVATION

6P COVER OPTION

- N6P FLOATING HINGES
- LIFT OFF PULL HANDLES
- WINDOW KIT (NON-UL)
- 135 DEGREE DOOR STOPPER

STANDARD STAINLESS PASSIVATION CLEANING
SUBMERSION PERFORMANCE TEST: 24 HR. @15 FT.
ISO17025 INSTRUMENTATION AND EQUIPMENT

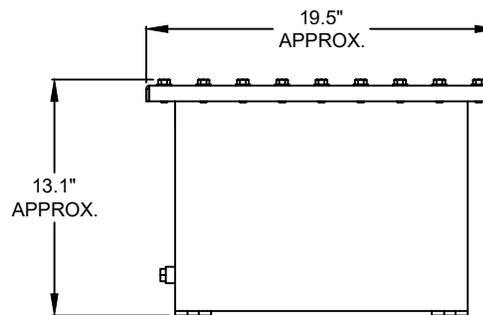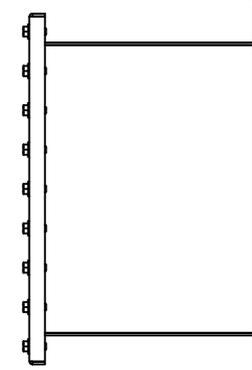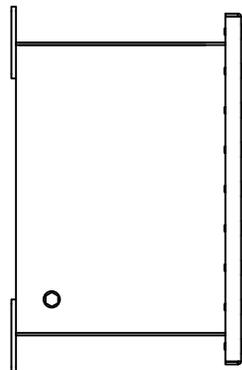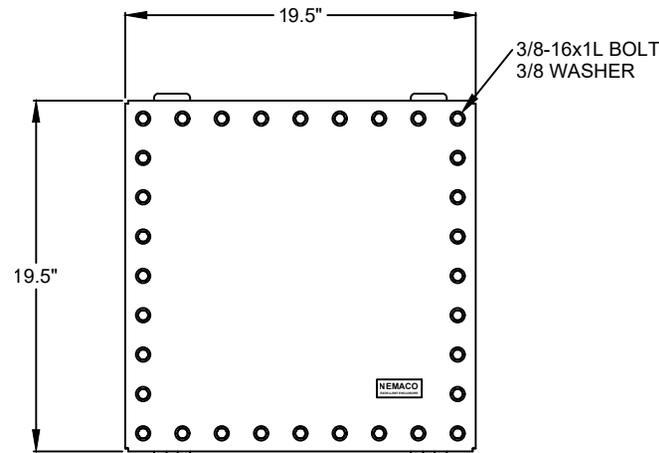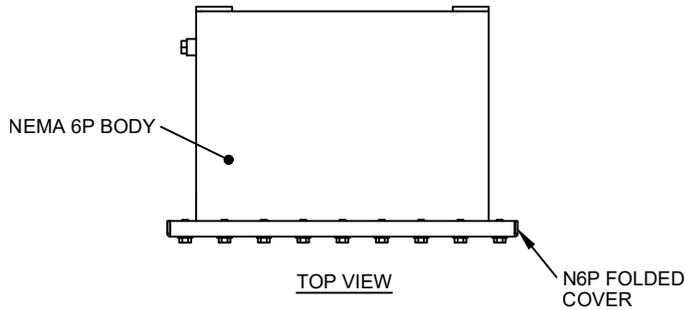

LIFTING EYES

- WELDED PADEYES
- NOT REQUIRED

CONDUIT/CABLE SOLUTION

- FNPT HUB
- CABLE GLAND
- ROXTEC SEALS

COVER GASKET OPTION

- UL RECOGNIZED SILICONE
- EPDM (NON-UL)
- VITON (NON-UL)
- BUNA-N (NON-UL)



COMPANY NAME

APPROVED (PRINTED NAME)

SIGNATURE

DATE

NEMA 6P ECO SERIES 16" H x 16" W x 12" D 1 DOOR DESIGN

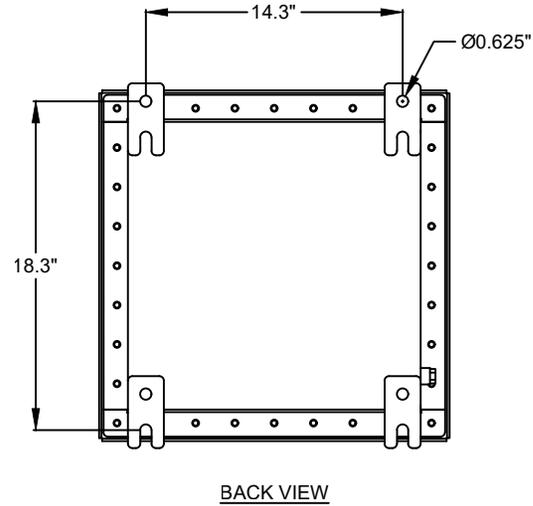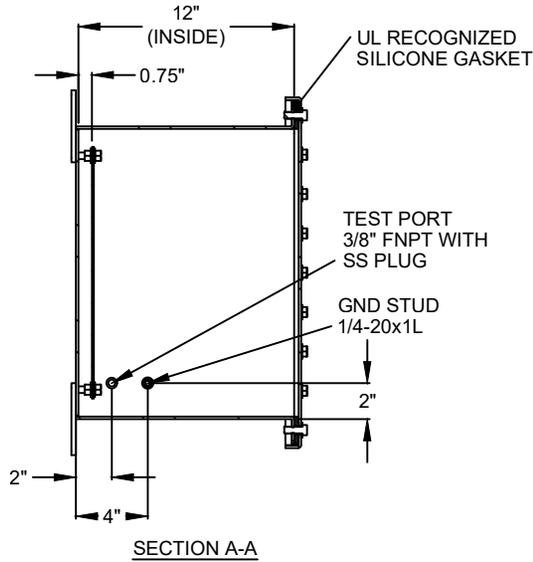

- INTERIOR PLATE**
- COATED STEEL (I6P1616-CS)
 - COATED ALUMINUM (I6P1616-AL)
 - 304 STAINLESS STEEL (I6P1616-S4)
 - 316 STAINLESS STEEL (I6P1616-S6)

- WATER SUBMERSION DEPTH**
- 15FT. SUBMERSION (STANDARD)
 - 30FT. SUBMERSION
 - 60FT. SUBMERSION
 - 100FT. SUBMERSION

- TEST DURATION**
- 24HR. (STANDARD)
 - 36HR.
 - 72HR.

